


WAAS CH 98719 W35A	APP CRS 352°	Rwy Idg TDZE 861 Apt Elev 861
--	------------------------	---

RNAV (GPS) RWY 35
MARION (C17)

RNP APCH - GPS. ▽ △ NA Baro-VNAV NA. Circling Rwy 17, NA at night. Circling NA for Cat B west of Rwy 17/35. Use The Eastern Iowa altimeter setting; when not received, use Monticello Rgnl altimeter setting; increase LPV DA to 1133; increase LNAV/VNAV DA to 1162; increase all MDAs 40 feet. For uncompensated Baro-VNAV system, LNAV/VNAV NA below -6°C or above 54°C.	MISSED APPROACH: Climb to 2600 direct HENCH and hold.
--	---

CID ASOS 124.15	CEDAR RAPIDS APP CON ★ 134.05 266.8	UNICOM 122.7 (CTAF) 0
---------------------------	---	---------------------------------

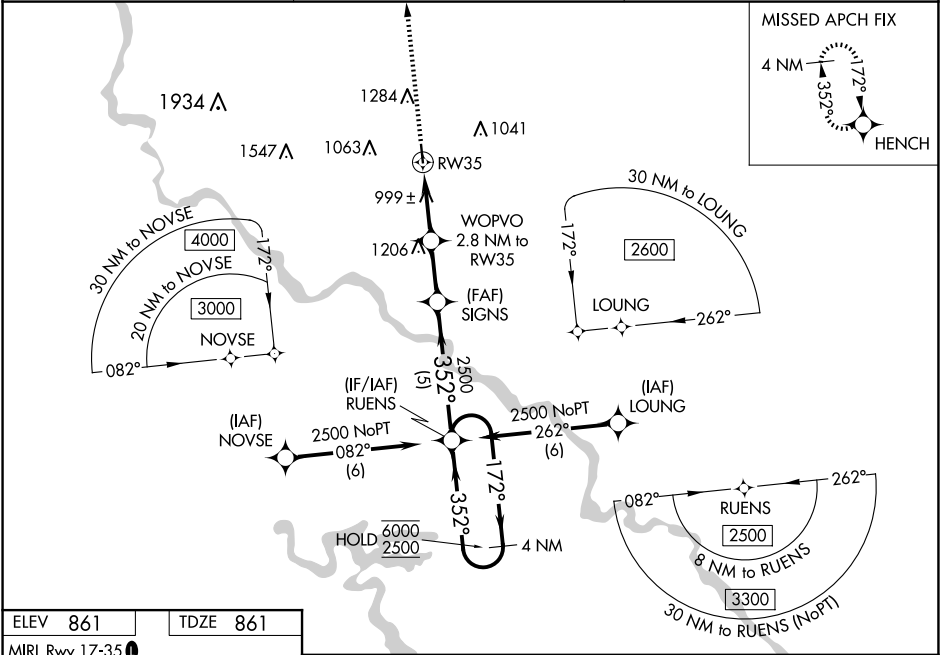

ELEV 861	TDZE 861
MIRL Rwy 17-35 0	

2600 HENCH		SIGNS 2500		RUENS 4 NM Holding Pattern	
WOPVO 2.8 NM to RW35		2500 352°		172° 6000	
RW35 1580		2500 352°		GP 3.00° TCH 40	
2.8 NM 2.2 NM 5 NM					
CATEGORY	A	B	C	D	
LPV DA	1111-1	250 (300-1)		NA	
LNAV/VNAV DA	1140-1	279 (300-1)		NA	
LNAV MDA	1280-1	419 (500-1)		NA	
CIRCLING	1280-1 419 (500-1)	1340-1 479 (500-1)		NA	

NC-3, 27 NOV 2025 to 25 DEC 2025

NC-3, 27 NOV 2025 to 25 DEC 2025