

LOC I-AFA

111.3

APP CRS

275°

Rwy Ldg

27R

11890

27L

8865

TDZE

985

999

Apt Elev

1026

1026

ILS or LOC RWY 27R

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

DME and RADAR required.

Simultaneous approach authorized. Inop table does not apply to S-ILS 27R all Cats. DME from GSU DME. DME use requires simultaneous reception of I-AFA and GSU DME.

Rwy 27R


MALS

Rwy 27L

ALSF-2

MISSED APPROACH: Climb to 1500 then climbing left turn to 4000 on heading 265° and RMG VORTAC R-165 to DUTIE/RMG 31.3 DME/RADAR and hold.

D-ATIS	ATLANTA	ATLANTA TOWER						ALL	GND CON	ALL
ARR 119.65	APP CON	8L-26R	8R-26L	9L-27R	9R-27L	10-28	RWYS	(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28
DEP 125.55	127.9 379.9	119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75	121.65 254.4

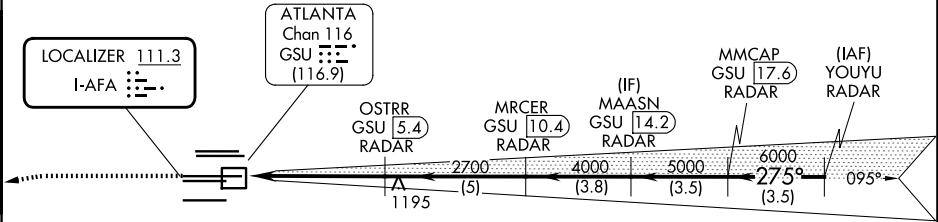

ELEV 1026	D	TDZE 27R 985
		TDZE 27L 999

