BOSTON DEP CON
133.0
D-ATIS
135.0
CLNC DEL
121.65 257.8
CPDLC
GND CON
121.75 121.9
BOSTON TOWER
128.8 257.8 (WEST)
132.225 257.8 (EAST)

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

TOP ALTITUDE: 5000

NOTE: Departures assigned routing via LBSTA, PEASE, MANCH, HYLND, or REVSS direct SPENO; BLZZR direct ONEPS; PATSS, GLYDE, or BOSOX expect RADAR vectors to the right to assigned route/fix.

NOTE: Departures assigned routing via CELTK, FRILL, LFV VOR/DME, ACK VOR/DME, BRUWN, SSOXS, LUCOS, SEY VOR/DME, or BURDY expect RADAR vectors to the left to assigned route/fix.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 27: Climb on heading 272° to intercept course 234° to cross WYLYY at or above 2300, then on depicted route to CYOTI, thence....

....expect vectors to assigned fix/NAVAID (see notes). Maintain 5000 or lower assigned altitude. Expect clearance to filed altitude/flight level within ten (10) minutes after departure.

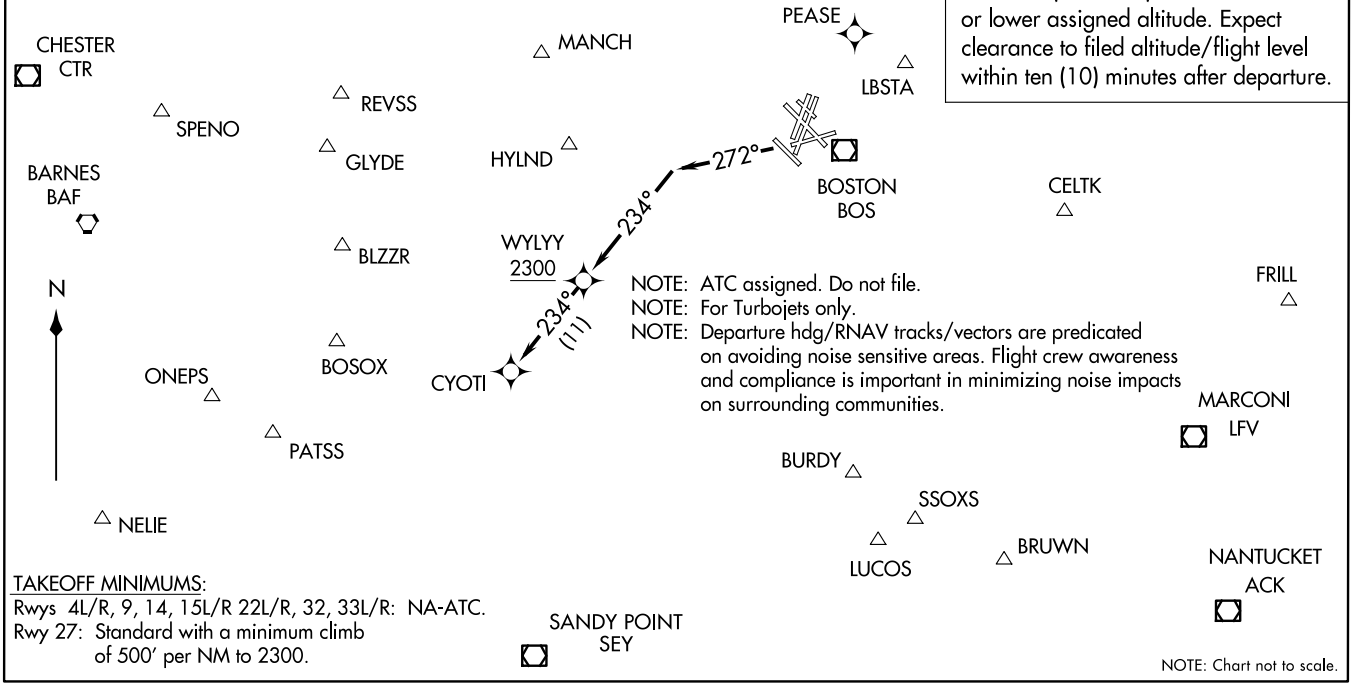

NOTE: ATC assigned. Do not file.
NOTE: For Turbojets only.
NOTE: Departure hdg/RNAV tracks/vectors are predicated on avoiding noise sensitive areas. Flight crew awareness and compliance is important in minimizing noise impacts on surrounding communities.

TAKEOFF MINIMUMS:
Rwys 4L/R, 9, 14, 15L/R 22L/R, 32, 33L/R: NA-ATC.
Rwy 27: Standard with a minimum climb of 500′ per NM to 2300.

NOTE: Chart not to scale.