


WAAS CH 62911 W30A	APP CRS 303°	Rwy Ldg 10201 TDZE 1380 Apt Elev 1384
--	------------------------	--

RNAV (GPS) Y RWY 30C

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C (29°F) or above 35°C (95°F). DME/DME RNP: 0.3 NA. When local altimeter setting not received, use Phoenix Sky Harbor Intl altimeter setting and increase LPV DA to 1660 feet, LNAV/VNAV DA to 1710 feet and all MDA 80 feet; increase LPV all Cats visibility $\frac{1}{8}$ SM, increase LNAV/VNAV all Cats, LNAV Cats C, D and E, and Circling Cats D, E visibility $\frac{1}{4}$ SM. VDP and Baro-VNAV NA with Phoenix Sky Harbor Intl altimeter setting.

MISSED APPROACH:
Climb to 2800 then
climbing left turn to
5000 direct GICGE
and hold.

ATIS 133.5 270.275	PHOENIX APP CON 124.9 353.8	GATEWAY TOWER ★ 120.6 (CTAF) 289.4	GND CON 128.25 275.8
------------------------------	---------------------------------------	--	--------------------------------

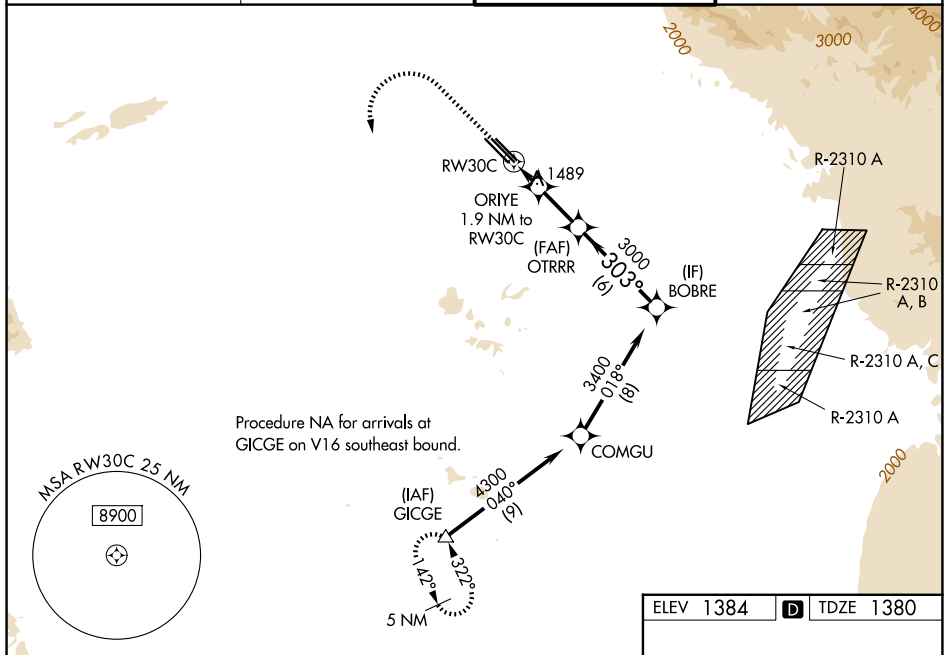

2800 ↑	5000 ↖	GICGE △	VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 49).				
* LNAV only.			ORIYE 1.9 NM to RW30C *1.2 NM to RW30C OTRRR 3000 BOBRE 3400 2020* 303° 3000 GP 3.00° TCH 42 1.2 NM 0.7 3.1 NM 6 NM 3.00 NM				
CATEGORY		A		B	C	D	E
LPV	DA	1580- ³ / ₄ 200 (200- ³ / ₄)					
LNAV/ VNAV	DA	1630- ⁷ / ₈ 250 (300- ⁷ / ₈)					
LNAV MDA		1800-1 420 (500-1)		1800-1 ¹ / ₈ 420 (500-1 ¹ / ₈)			
CIRCLING		1880-1 496 (500-1)		1880-1 ¹ / ₂ 496 (500-1 ¹ / ₂)	2000-2 616 (700-2)	2040-2 ¹ / ₄ 656 (700-2 ¹ / ₄)	

