

WAAS CH 72808 W31A	APP CRS 313°	Rwy Ldg 8000 TDZE 477 Apt Elev 487
--	------------------------	---

RNAV (GPS) Y RWY 31L
DALLAS LOVE FLD (DAL)

RNP APCH.


T Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations. For inop ALS, increase LPV all Cats visibility to RVR 4500.

MALSR




MISSED APPROACH: Climb to 1700 then climbing right turn to 4000 direct TADDI and hold.

D-ATIS 120.15	LONE STAR APP CON 124.3 282.275 (N) 125.2 343.65 (S)	LOVE TOWER 123.7 239.3	GND CON 121.75 348.6
-------------------------	--	----------------------------------	--------------------------------

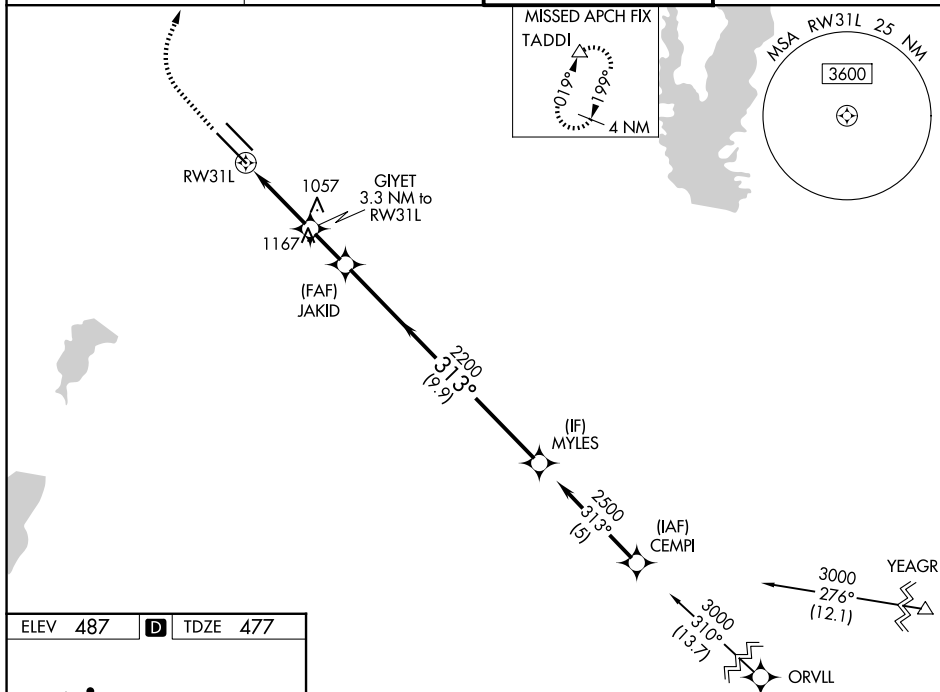

ELEV 487	D	TDZE 477
----------	----------	----------

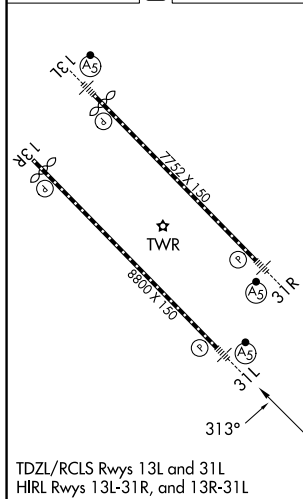

*LNAV only.

1700
↑

4000
↷

TADDI
△

RW31L

GIYET
3.3 NM to RW31L

JAKID
2200

MYLES
2500

*2.5 NM to RW31L

2.5 NM

0.8 NM

1.8 NM

9.9 NM

1600*

2200

313°

GP 3.08°
TCH 55

CATEGORY	A	B	C	D
LPV DA		770/22	293 (300-½)	
LNAV MDA	1360/40	883 (900-¾)	1360-2	883 (900-2)
CIRCLING	1360-1¼	873 (900-1¼)	1360-2½ 873 (900-2½)	1520-3 1033 (1100-3)