



APP CRS	Rwy Ldg	12003
216°	TDZE	637
	Apt Elev	645

RNAV (RNP) X RWY 22L
DETROIT METRO WAYNE COUNTY (DTW)

RNP AR APCH.			MALSR		MISSED APPROACH: Climb to 4000 direct HWLER and hold.	
For uncompensated Baro-VNAV systems, procedure NA below -10°C (14°F) or above 54°C (130°F). Simultaneous approach authorized. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to RVR 6000.						
D-ATIS	DETROIT APP CON	METRO TOWER	GND CON		CLNC DEL	CPDLC
133.675	124.05 284.0	128.125 317.725	121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)		120.65	

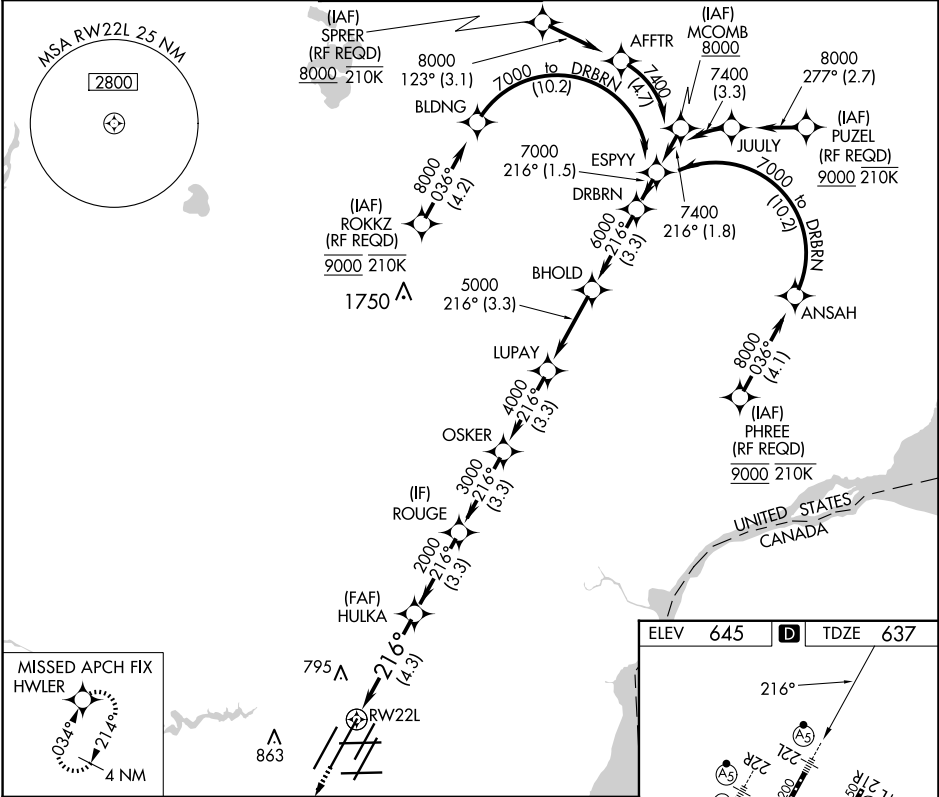

4000	HWLER	DRBRN					
							
		HULKA 2000	ROUGE 3000	OSKER 4000	LUPAY 5000	BHOLD 6000	21° 7000
		4.3 NM	3.3 NM	3.3 NM	3.3 NM	3.3 NM	GP 2.85° TCH 60
CATEGORY	A	B		C		D	
RNP 0.15 DA	941/24		304 (300-½)				
RNP 0.30 DA	1040/40		403 (400-¾)				
AUTHORIZATION REQUIRED							

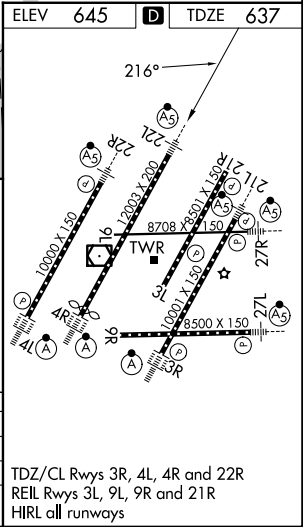

EC-1, 25 DEC 2025 to 22 JAN 2026

EC-1, 25 DEC 2025 to 22 JAN 2026