

WAAS CH 48904 W10A	APP CRS 093°	Rwy Ldg 12246 TDZE 672 Apt Elev 680
--	------------------------	--

RNAV (GPS) RWY 10L
CHICAGO O'HARE INTL (ORD)

RADAR required for procedure entry. RNP APCH.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2




MISSED APPROACH: Climb to 4000 direct XURXU and on track 161° to CGT VORTAC and hold.

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 132.7 348.0	GND CON (TWR NORTH) 124.125 (TWR SOUTH) 118.05 (ALL TWRS) 226.675	(TWR CENTER) 121.75 (IBND) 121.9 (IBND)	CLNC DEL 121.6	CPDLC
--	--	------------------------------------	---	---	--------------------------	-------

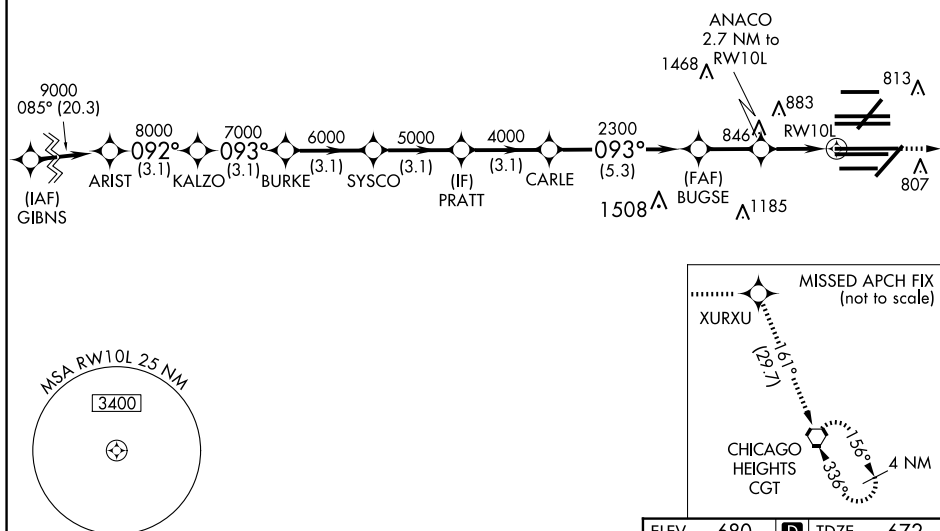


ELEV	680	D	TDZE	672
------	-----	----------	------	-----

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 74).

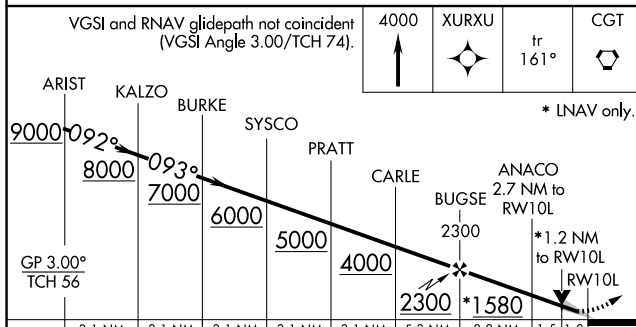

CATEGORY		A		B		C		D	
LPV	DA	872/18				200 (200-½)			
LNAV/ VNAV	DA	1062/35				390 (400-¾)			
LNAV	MDA	1120/24	448 (500-½)			1120/45	448 (500-¾)		

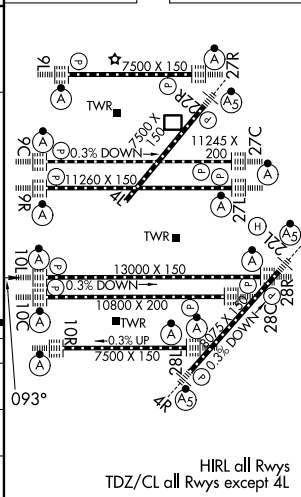

CHICAGO, ILLINOIS
Amdt 5B 26MAR20

41°59'N-87°54'W

CHICAGO O'HARE INTL (ORD)
RNAV (GPS) RWY 10L