

WAAS CH 70643 W27D	APP CRS 273°	Rwy Ldg 11245 TDZE 653 Apt Elev 680
--	------------------------	--

RNAV (GPS) RWY 27C
CHICAGO O'HARE INTL (ORD)

RNP APCH.

T Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to RVR 6000.


ALSF-2




MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 direct UKUNE and hold.

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 121.15 348.0	GND CON (TWR CENTER) 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs)	121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6	CPDLC
--	--	-------------------------------------	--	--------------------------------------	--------------------------	-------

MISSED APCH FIX

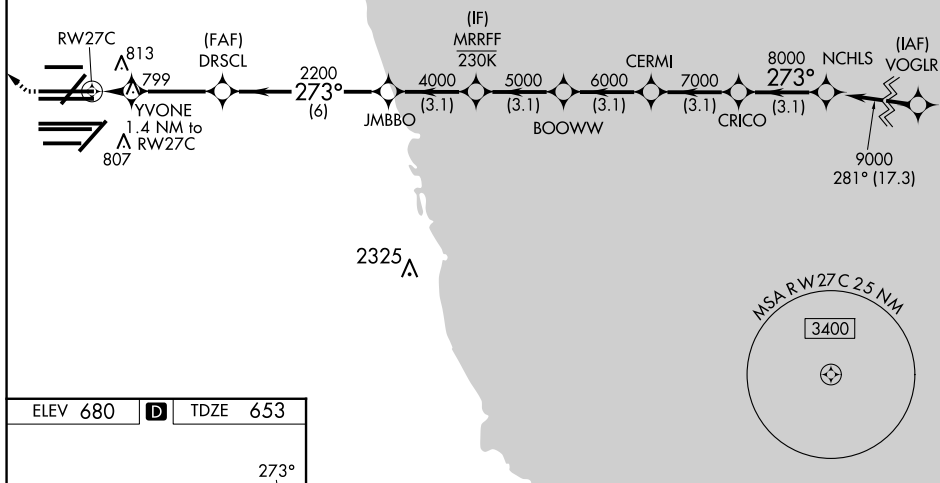

ELEV 680	D	TDZE 653
----------	----------	----------

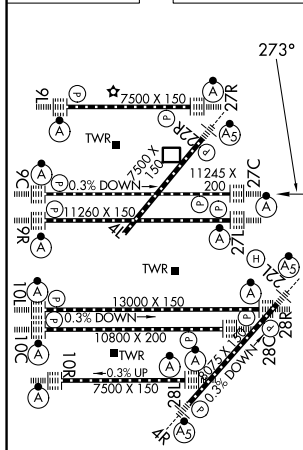

HIRL all Rwys
TDZ/CL all Rwys except 4L

Figure 1 is a VGSB chart showing a profile with various waypoints and altitudes. The profile starts at 1100, rises to 4000, then to 9000. Key waypoints include YVONE (1.4 NM to RW27C), DRSC (2200), JMBBO (4000), MRRFF (5000), BOOWW (6000), CERMI (7000), and CRICO (8000). The profile ends at 9000. The chart also shows the VGSB angle (3.00/TCH 75) and the VGSB MDA (1060/24).