| APP CRS | Rwy Ldg | 11200 |
|---|---|---|
| 230° | TDZE | 783 |
| | Apt Elev | 796 |

# RNAV (RNP) Z RWY 23R

## INDIANAPOLIS INTL (IND)

For uncompensated Baro-VNAV systems, procedure NA below -18°C (0°F) or above 54°C (130°F). GPS Required. For inoperative ALS, increase RNP 0.15 all Cats visibility to RVR 6000 and increase RNP 0.30 all Cats visibility to 1⅜ SM. Simultaneous approach authorized.

MALSR

MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 direct KEADY and hold.

| D-ATIS | INDIANAPOLIS APP CON | INDY TOWER | GND CON | CLNC DEL | CPDLC |
|---|---|---|---|---|---|
| 134.25 | 128.175 317.8 | 120.9 251.1 | 121.9 | 128.75 251.1 | |

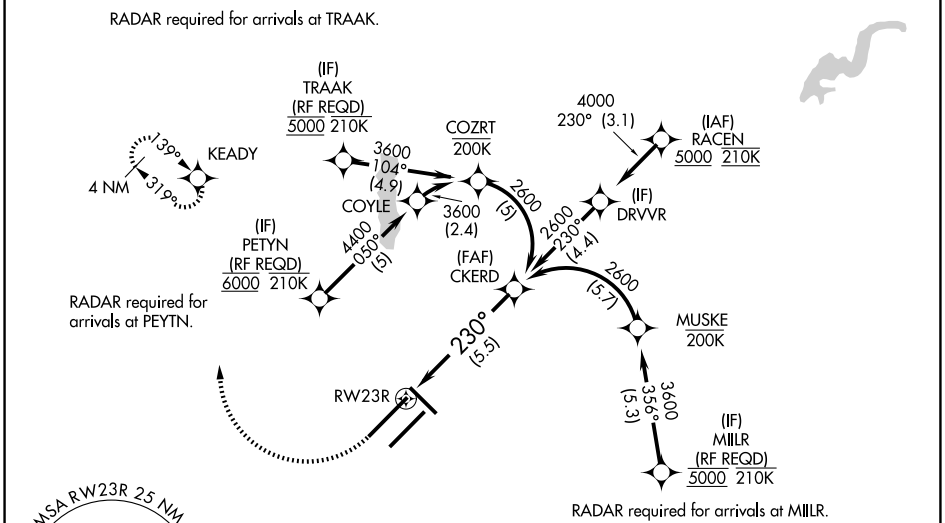


| ELEV | 796 | D | TDZE | 783 |
|---|---|---|---|---|

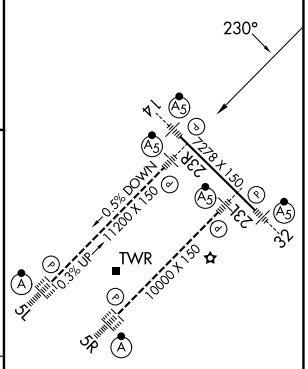


HIRL all Rwys
TDZ/CL Rwys 5L and 5R

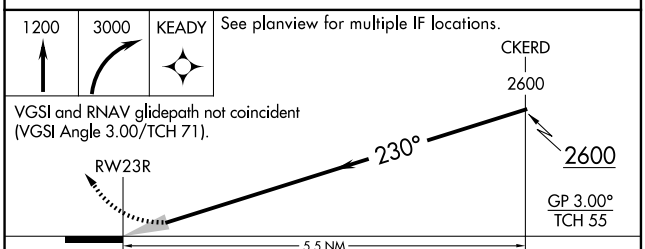


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| RNP 0.15 DA | 1147/40 364 (400-¾) | | | |
| RNP 0.30 DA | 1206/50 423 (500-1) | | | |

**AUTHORIZATION REQUIRED**

EC-2, 25 DEC 2025 to 22 JAN 2026

EC-2, 25 DEC 2025 to 22 JAN 2026