


WAAS CH 62802 W32A	APP CRS 320°	Rwy Ldg TDZE 793 Apt Elev 796
--	------------------------	---


RNAV (GPS) Y RWY 32

INDIANAPOLIS INTL (IND)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. **RVR 1800 authorized with use of FD or AP or HUD to DA.			MALSRR AS	MISSED APPROACH: Climb to 3000 direct KEADY and hold.	
D-ATIS 134.25	INDIANAPOLIS APP CON 128.175 317.8	INDY TOWER 120.9 251.1	GND CON 121.9	CLNC DEL 128.75 251.1	CPDLC

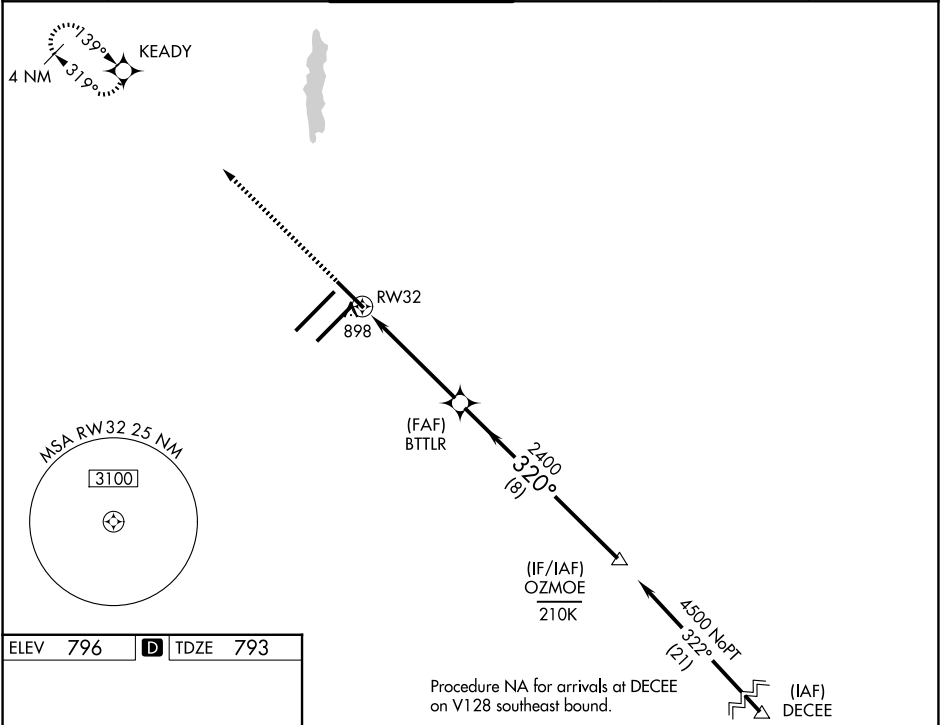

ELEV 796	D	TDZE 793
-----------------	----------	-----------------

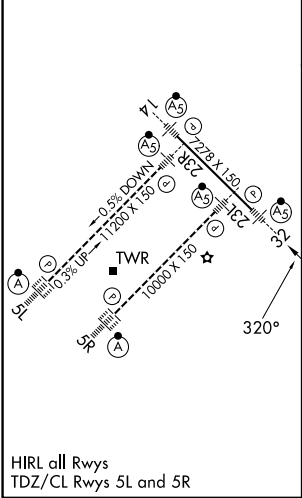

HIRL all Rwys
TDZ/CL Rwys 5L and 5R

3000 KEADY		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).		OZMOE	
*LNAV only		*1 NM to RW32		4500	
BTTLR		2400		GP 3.00°	
RW32		2400		TCH 53	
1 NM		3.9 NM		8 NM	
CATEGORY	A	B	C	D	
LPV DA	** 993/24		200 (200-½)		
LNAV/VNAV DA	1069/24		276 (300-½)		
LNAV MDA	1160/24	367 (400-½)	1160/35	367 (400-¾)	
CIRCLING	1420-1	624 (700-1)	1420-1¾ 624 (700-1¾)	1560-2½ 764 (800-2½)	