

WAAS CH 78206 W09A	APP CRS 090°	Rwy Ldg TDZE 717 Apt Elev 717
--	------------------------	---

RNAV (GPS) RWY 9

TRI-COUNTY RGNL (LNR)

RNP APCH

▼

⚠

❄ -31°C


Circling Rwy 18, 36 NA at night. Baro-VNAV and VDP NA when using Dane County Rgnl-Truax Fld altimeter setting. Rwy 9 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. When local altimeter setting not received, use Dane County Rgnl-Truax Fld altimeter setting and increase LPV DA to 1104, LNAV/VNAV DA to 1769, and all MDA 120 feet. Increase LPV visibility all Cats ½ SM, LNAV visibility Cat C and Circling visibility Cat A ¼ SM, Circling visibility Cat C ½ SM.

MISSED APPROACH:
Climb to 3000 direct CABIG and hold.

ASOS
119.425

MADISON APP CON ★
135.45 343.7

UNICOM
123.0 (CTAF) **0**

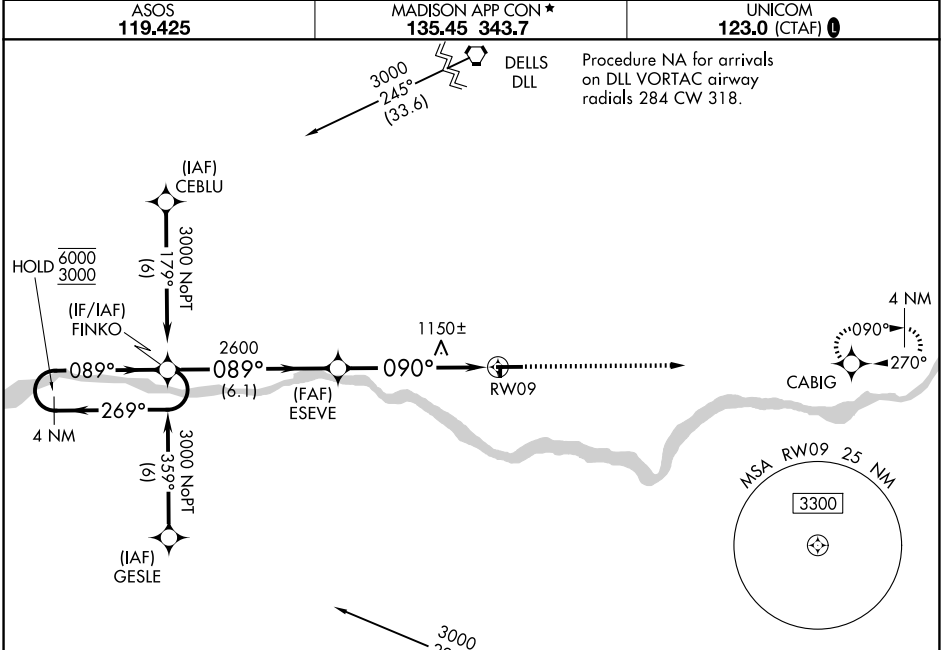

ELEV 717

TDZE 717

4 NM Holding Pattern

FINKO

GP 3.00°
TCH 35

ESEVE

RWY 09

* LNAV only.

* 2.2 NM to RWY 09

6.1 NM

3.5 NM

2.2 NM

CATEGORY	A	B	C	D
LPV DA	994-1	277 (300-1)		NA
LNAV/VNAV DA	1659-4	942 (1000-4)		NA
LNAV MDA	1460-1 743 (800-1)	1460-1¼ 743 (800-1¼)	1460-2¼ 743 (800-2¼)	NA
CIRCLING	1520-1 803 (900-1)	1520-1¼ 803 (900-1¼)	1560-2½ 843 (900-2½)	NA

REIL Rwy 9 and 27 **0**

MIRL Rwy 9-27 and 18-36 **0**