

WAAS CH 82507 W06A	APP CRS 071°	Rwy Ldg 8566 TDZE 119 Apt Elev 128
--	------------------------	---

RNAV (GPS) Y RWY 6L

LOS ANGELES INTL (LAX)


▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C (41°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. Simultaneous approach authorized.

MALSR

MISSED APPROACH: Climb to 3000 direct ZANAV and track 042° to AMTRA and hold.

D-ATIS 133.8	SOCAL APP CON 124.3 363.2 (APCH from W) 124.9 269.0 (090°-224°) 124.5 235.975 (225°-044°) 128.5 360.7 (045°-089°)	LOS ANGELES TOWER 133.9 239.3 (N) 120.95 379.1 (S)	GND CON 121.65 327.0 (N) 121.75 327.0 (S) 121.4 327.0 (W)
------------------------	---	--	---

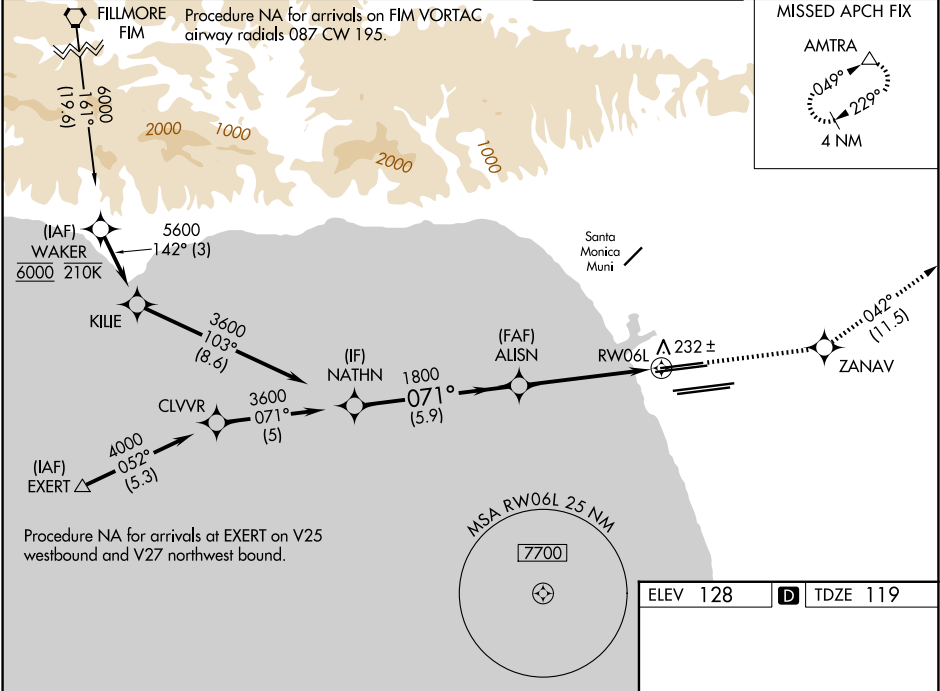

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 77).				3000	ZANAV	tr 042°	AMTRA
NATHN 3600 071° 1800 ALISN 1800 5.9 NM 4.1 NM 1 NM GP 3.00° TCH 55 * 1 NM to RW06L RW06L * LNAV only							
CATEGORY	A		B	C	D		
LPV DA	369/24 250 (300-½)						
LNAV/ VNAV DA	411/24 292 (300-½)						
LNAV MDA	500/24 381 (400-½)			500/35 381 (400-¾)			

