


WAAS CH 69310 W10A	APP CRS 105°	Rwy Ldg TDZE 2869 Apt Elev 2872
--	------------------------	---

RNAV (GPS) RWY 10


MIDLAND INTL AIR AND SPACE PORT (M.A.F')

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 25°C (77°F). Circling Rwy 16L NA at night. DME/DME RNP-0.3 NA. ** RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR MISSED APPROACH: Climb to 4700 direct EASYY and hold.
--	---

ATIS 126.8 235.975	MIDLAND APP CON* 124.6 290.4	MIDLAND TOWER* 118.7 (CTAF) 0273.45	GND CON 121.9 348.6	UNICOM 122.95
------------------------------	--	---	-------------------------------	-------------------------

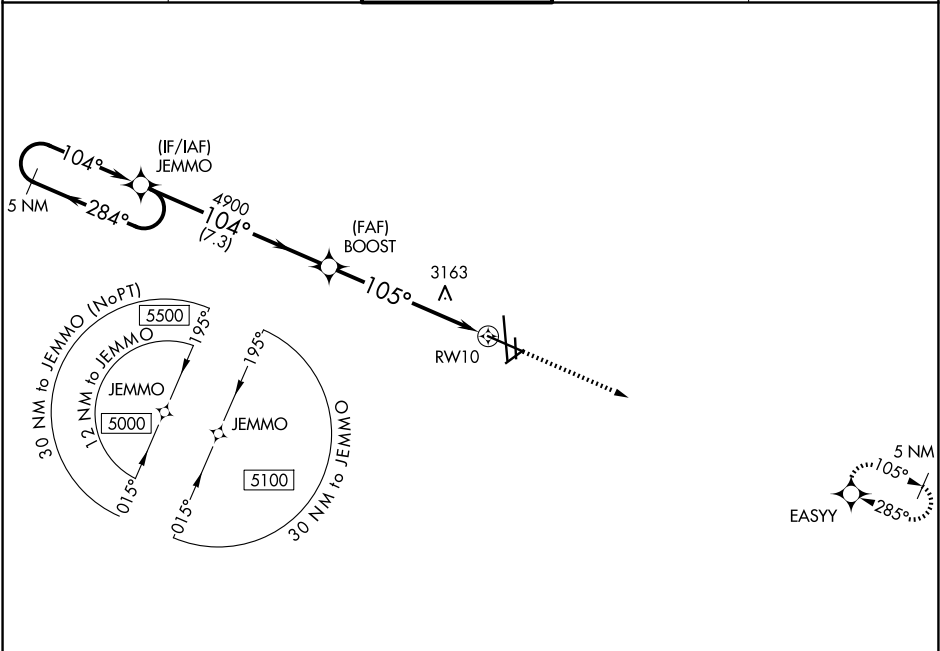

5 NM Holding Pattern					4700	EASYY
					*LNAV only	
CATEGORY	A	B	C	D		
LPV DA **	3069/24 200 (200-½)					
LNAV/VNAV DA	3394-1¼ 525 (600-1¼)					
LNAV MDA	3480/24	611 (700-½)	3480-1⅜	611 (700-1⅜)		
CIRCLING	3480-1	608 (700-1)	3480-1¾	3520-2		
			608 (700-1¾)	648 (700-2)		

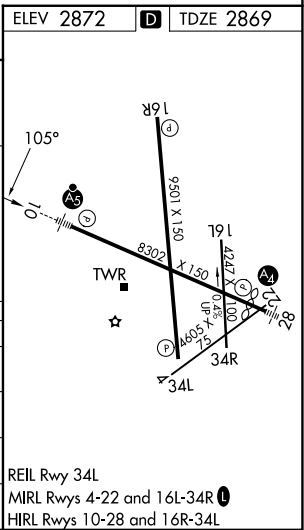

SC-3, 25 DEC 2025 to 22 JAN 2026

SC-3, 25 DEC 2025 to 22 JAN 2026