

MILES CITY, MONTANA

AL-259 (FAA)

25331

WAAS CH 77924 W22A	APP CRS 223°	Rwy Ldg 5764 TDZE 2630 Apt Elev 2634
--	------------------------	---


RNAV (GPS) RWY 22
FRANK WILEY FLD (MLS)

RNP APCH-GPS.

Baro-VNAV and VDP NA when using Glendive altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C. When local altimeter setting not received, use Glendive altimeter setting: increase LPV and LNAV/VNAV DA to 3047 and all visibilities $\frac{1}{8}$ SM. Increase all MDA 180 feet and LNAV Cat C and D visibilities $\frac{3}{8}$ SM and Circling Cat C and D visibilities $\frac{1}{2}$ SM.

MISSED APPROACH: Climb to 6000 direct OPEJY and hold, continue climb-in-hold to 6000.

ASOS 135,575	SALT LAKE CENTER 126.85 305.2	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

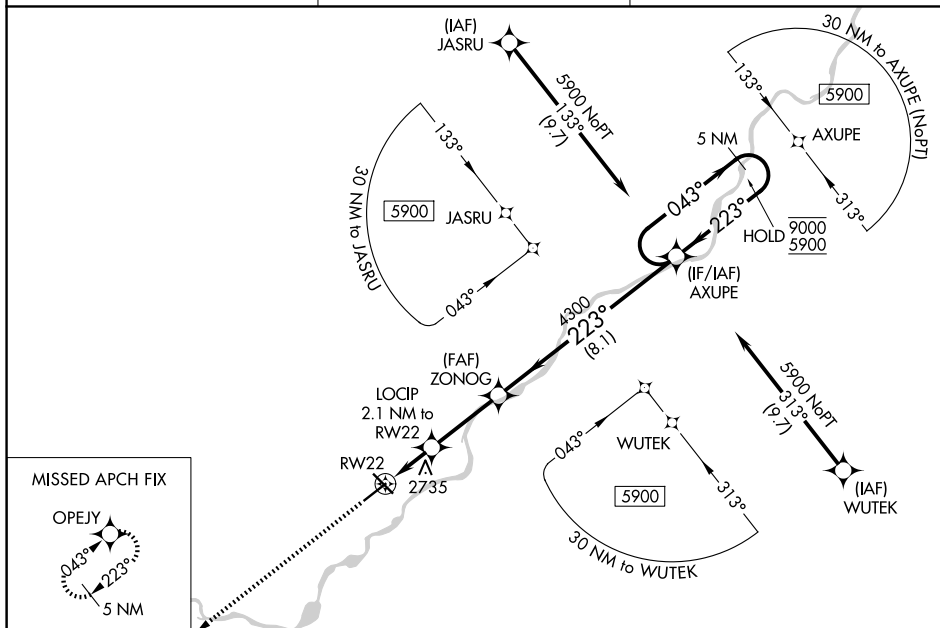

MILES CITY, MONTANA

Amdt 2 27JAN22

46°26'N-105°53'W

FRANK WILEY FLD (MLS)

RNAV (GPS) RWY 22

NW-1, 25 DEC 2025 to 22 JAN 2026

NW-1, 25 DEC 2025 to 22 JAN 2026