
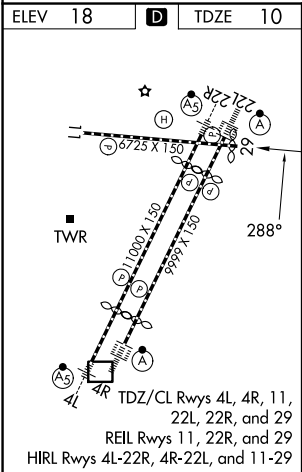


APP CRS	Rwy Ldg	6501
288°	TDZE	10
	Apt Elev	18

RNAV (RNP) Z RWY 29

NEWARK LIBERTY INTL (EWR)

RNP AR APCH. RF required.			MISSED APPROACH: Climb to 3000 on track 288° to JETVY and left turn to FIRSI, and on track 228° to DIRMY and hold.		
Straight-in Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. For uncompensated Baro-VNAV systems, procedure NA below -14°C or above 54°C. * Missed approach requires minimum climb of 340 feet per NM to 800.					
D-ATIS	NEWARK APP CON	NEWARK TOWER	GND CON	CLNC DEL	CPDLC
115.7 134.825	128.55 379.9	118.3 257.6	121.8	118.85	

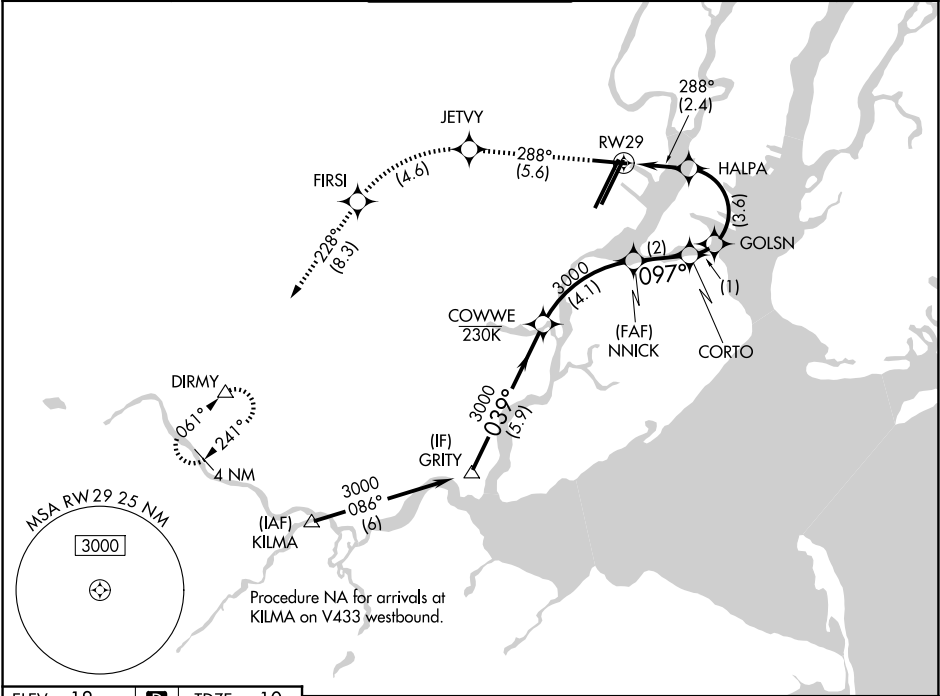

3000	↑	tr 288°	JETVY	FIRSI	DIRMY	
CATEGORY		A		B	C	D
RNP 0.16 DA		466-1½		456 (500-1½)		NA
*RNP 0.30 DA		485-1½		475 (500-1½)		NA
RNP 0.30 DA		573-2		563 (600-2)		NA
AUTHORIZATION REQUIRED						

RNAV (RNP) Z RWY 29

NE-2, 25 DEC 2025 to 22 JAN 2026

NE-2, 25 DEC 2025 to 22 JAN 2026