

PANAMA CITY, FLORIDA

RNAV (GPS) RWY 14L

WAAS CH 71271 W14A	APCH CRS 138°	Rwy ldg TDZE Arpt Elev	10,008 14 17
--------------------------	------------------	------------------------------	--------------------

(USAF)



TYNDALL AFB (KPM)

RNP APCH - GPS	ALSIF-1 	MISSED APPROACH: Climb to 600 then climbing left turn to 3000 direct NENCY and hold.
▼ * When ALS inop, increase RVR to 40, vis to 3/4 mile. ** When ALS inop, increase RVR to 45, vis to 7/8 mile. *** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CDE vis to 1 3/8 miles.		

ATIS★ 254.4	APP CON/DEP CON★ 119.775 317.45 BLW 5000' 124.15 338.35 ABV 5000'	TOWER★ 133.95 263.15	GND CON 121.9 259.3	ASR/PAR
----------------	---	-------------------------	------------------------	---------

For uncompensated Baro-VNAV systems, Procedure NA below 15°C (59°F) or above 54°C (130°F).

Average Cold Temperature based on standard -30.00°C ISA deviation.

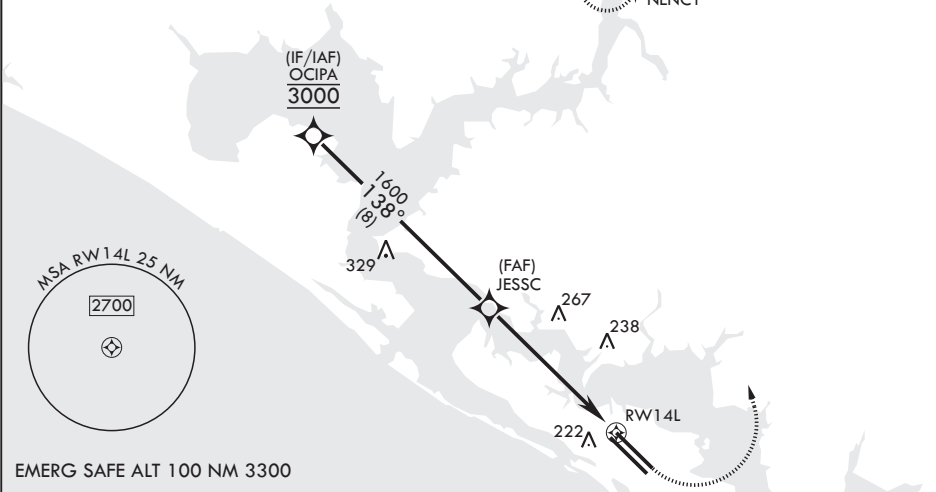

OCIPA 3000		JESSC 1600		RWY 14L ELEV 17		TDZE 14
GP 2.50° TCH 51		1.6 NM to RWY 14L		138°		
5.8 NM		10,008 x 200		101.88 x 150		
BCN 173		TWR 148		32L 32R		
CATEGORY	A	B	C	D	E	
LPV DA*	214/24		200	(200-½)		
LNAV/VNAV DA**	276/24 262 (300-½)	287/24 273 (300-½)	295/24 281 (300-½)	306/24	292 (300-½)	
LNAV MDA***	500/24 486 (500-½)		500/50	486	(500-1)	
CIRCLING	540-1 523 (600-1)		540-1½ 523 (600-1½)	580-2	563 (600-2)	
HIRL all rwys Recommend Rwy 14L-32R for apch end engagement of A-Gear.						

PANAMA CITY, FLORIDA

30°04'N - 85°35'W

TYNDALL AFB (KPM)

Amdt 5 27NOV25

RNAV (GPS) RWY 14L

SE-3, 25 DEC 2025 to 22 JAN 2026

SE-3, 25 DEC 2025 to 22 JAN 2026