

WAAS CH 70321 W26A	APP CRS 258°	Rwy Ldg 11489 TDZE 1135 Apt Elev 1135
--	------------------------	--

RNAV (GPS) Y RWY 26
PHOENIX SKY HARBOR INTL (PHX)

RNP APCH-GPS.



⚠

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below 2°C or above 54°C.

MISSED APPROACH:

Climb to 1700 then climbing right turn to 6000 direct RAXEE and hold.

D-ATIS 127.575	PHOENIX APP CON 128.65 353.9	PHOENIX TOWER 118.7 278.8 (8-26) 120.9 254.3 (7L-25R, 7R-25L)	GND CON 119.75 269.2 (N) 132.55 269.2 (S)
--------------------------	--	---	---

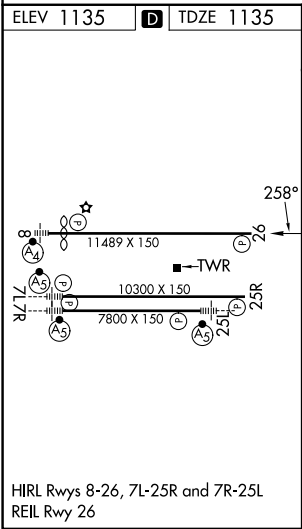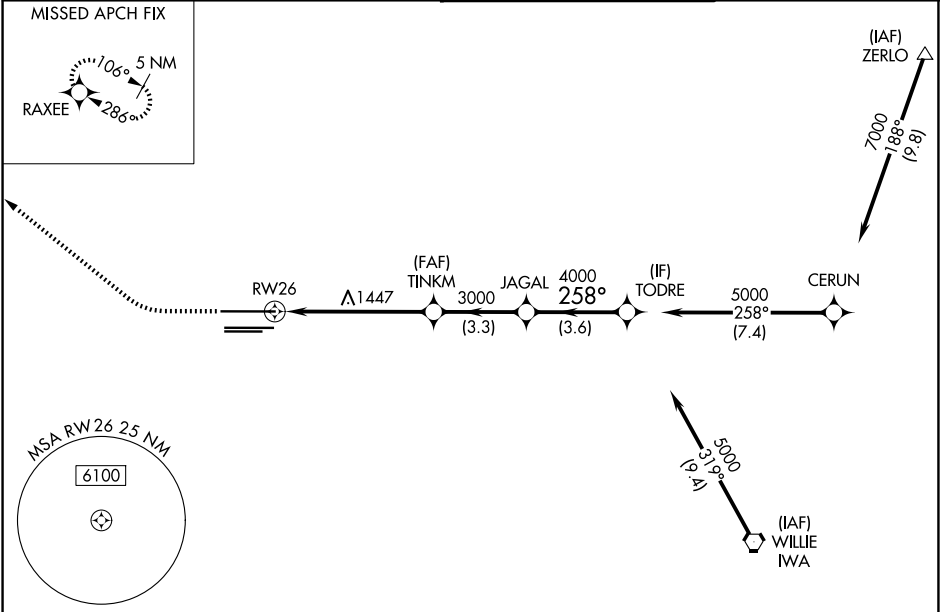

1700 6000 RAXEE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 71).

CATEGORY	A	B	C	D
LPV DA	1390-3⁄4 255 (300-3⁄4)			
LNAV/VNAV DA	1581-13⁄8 446 (500-13⁄8)			
LNAV MDA	1700-1	565 (600-1)	1700-15⁄8	565 (600-15⁄8)
CIRCLING	1740-1	605 (700-1)	2040-23⁄4 905 (1000-23⁄4)	2340-3 1205 (1300-3)