


LOC I-RGJ <u>110.7</u>	APP CRS 157°	Rwy Ldg TDZE Apt Elev	9003 167 168
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 16

⚠ ⚠	For inop ALS, increase S-LOC 16 Cats C and D visibility to 2 SM. GORDD Fix Minimums: for inop ALS, increase S-LOC 16 Cats C and D visibility to 1½ SM. **RVR 1800 authorized with use of FD or AP or HUD to DA. # DME from RIC VORTAC.	MALSR 	MISSED APPROACH: Climb to 2000 direct HPW VORTAC and hold.
------------------------------	---	--	---

ATIS		POTOMAC APP CON		RICHMOND TOWER		GND CON	
119.15	263.025	126.4	282.375 (001°-185°)	121.1	257.8	121.9	348.6
		126.75	307.2 (186°-360°)				

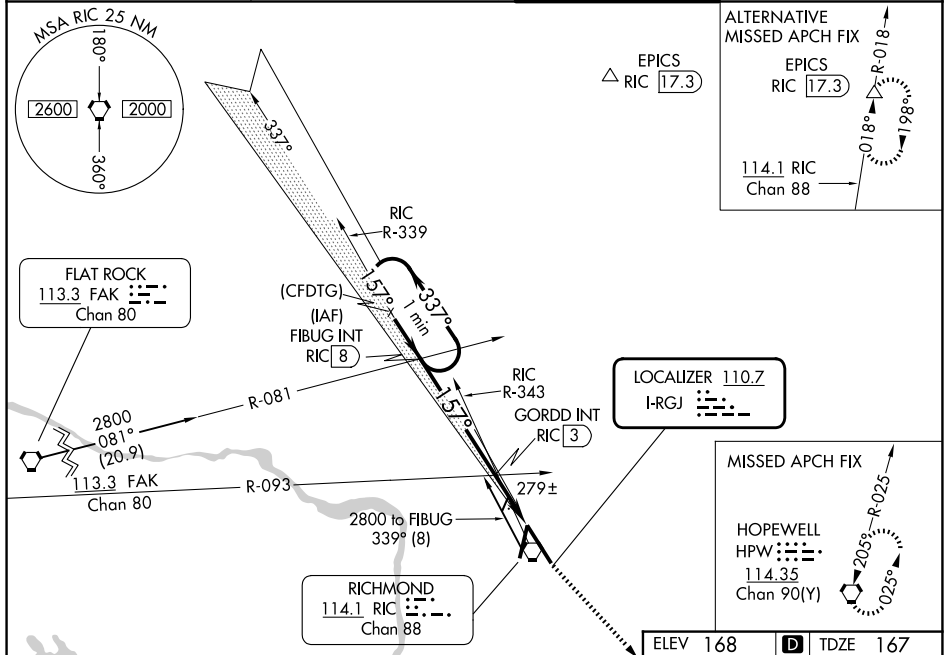

One Minute Holding Pattern

FIBUG INT RIC [8]

GORDD INT RIC [3]

***LOC only.**

RIC [0.9]

GS 3.00° TCH 54

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).

2800 ← 337° → 2500

157°

2500

5 NM

2.1 NM

920

157°

2000

HPW

TWR

157°

91 A5

02 A5

150

9003 X 150

21 A5

34

CATEGORY	A	B	C	D
S-ILS 16 **		367/24	200 (200-½)	
S-LOC 16	920/24 753 (800-½)	920/40 753 (800-¾)	920-1¾	753 (800-1¾)
CIRCLING	920-1 752 (800-1)	920-1¼ 752 (800-1¼)	920-2½	752 (800-2½)

GORDD FIX MINIMUMS #

S-LOC 16	580/24	413 (500-½)	580/40	413 (500-¾)
CIRCLING	660-1	492 (500-1)	700-1½ 532 (600-1½)	720-2 552 (600-2)

TDZ/CL Rwy 34

HIRL Rwys 2-20 and 16-34

REIL Rwy 20

FAF to MAP 7.2 NM

Knots	60	90	120	150	180
Min:Sec	7:12	4:48	3:36	2:53	2:22

NE-3, 25 DEC 2025 to 22 JAN 2026

NE-3. 25 DEC 2025 to 22 JAN 2026