

WAAS CH 65835 W31A	APP CRS 312°	Rwy Ldg 4797 TDZE 812 Apt Elev 827
--	------------------------	---


RNAV (GPS) RWY 31
ROSECRANS MEML (STJ)

ASR/PAR


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DE RNP-0.3 NA. Baro-VNAV and VDP NA when using Kansas City Intl altimeter setting. Straight-In minimums NA at night. When local altimeter setting not received, use Kansas City Intl altimeter setting and increase all DA 97 feet and increase LPV visibility $\frac{1}{2}$ mile and LNAV/VNAV visibility $\frac{3}{8}$ mile all Cats; increase all MDA 100 feet and LNAV Cat C and D visibility $\frac{1}{2}$ mile, and Circling Cat C $\frac{1}{2}$ mile, Cat D $\frac{1}{4}$ mile.

MISSED APPROACH:
Climb to 3100 direct
OVEGE and hold.

ATIS 125.05	ST. JOSEPH APP CON ★ 120.35 360.8	ST. JOSEPH TOWER ★ 126.9(CTAF) 0239.0	GND CON 121.9	UNICOM 122.95
----------------	--------------------------------------	--	------------------	------------------

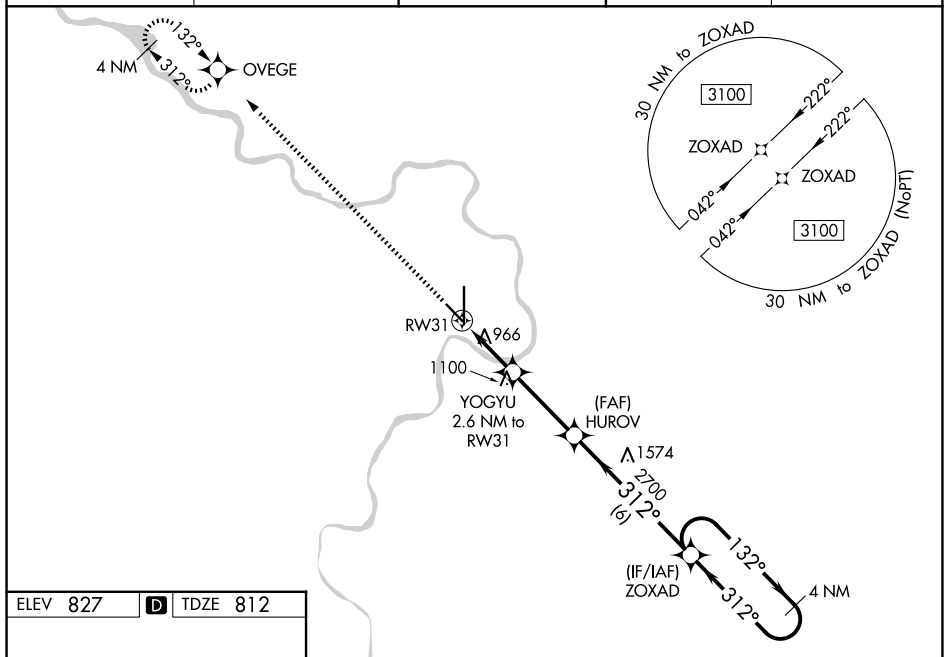

ELEV 827	D	TDZE 812
----------	----------	----------

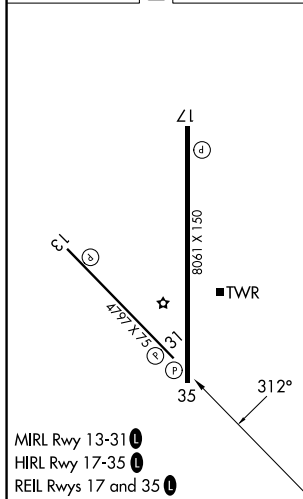

***RNAV only.**

4 NM Holding Pattern

3100

OVEGE

YOGYU
2.6 NM to RW31

HUROV
2700

ZOXAD

RW31

1700*

1.1 NM

1.5 NM

3.2 NM

6 NM

312°

132°

312°

3100

**GP 3.00°
TCH 50**

CATEGORY	A	B	C	D
LPV DA	1062-1 250 (300-1)			
LNAN/VNAV DA	1255-1½ 443 (500-1½)			
LNAN MDA	1220-1 408 (400-1)		1220-1⅛ 408 (400-1⅛)	
CIRCLING	1400-1 573 (600-1)	1420-1 593 (600-1)	1620-2¼ 793 (800-2¼)	1640-2¾ 813 (900-2¾)

RNAV (GPS) RWY 31