
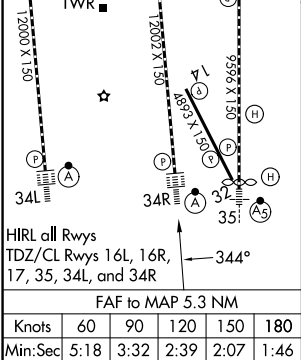


LOC/DME I-SLC 109.5 Chan 32	APP CRS 344°	Rwy Ldg TDZE 4225 Apt Elev 4231
---	------------------------	---

ILS or LOC RWY 34R
SALT LAKE CITY INTL (SLC)

RNP APCH - GPS. From QWENN or JAZZZ.		ALSF-2 	MISSED APPROACH: Climb to 9000 direct TCH VORTAC and on TCH VORTAC R-331 to OGD VORTAC and hold.
DME required for LOC only. DME or RADAR required.			
 Simultaneous approach authorized. For inop ALS, increase S-LOC 34R Cat C/D visibility to RVR 5500.			

D-ATIS 124.75 125.625	SALT LAKE CITY APP CON 125.7 284.6	SALT LAKE CITY TOWER 119.05 257.8	GND CON 123.775 348.6	CLNC DEL 127.3 379.975	CPDLC
---------------------------------	--	---	---------------------------------	----------------------------------	-------

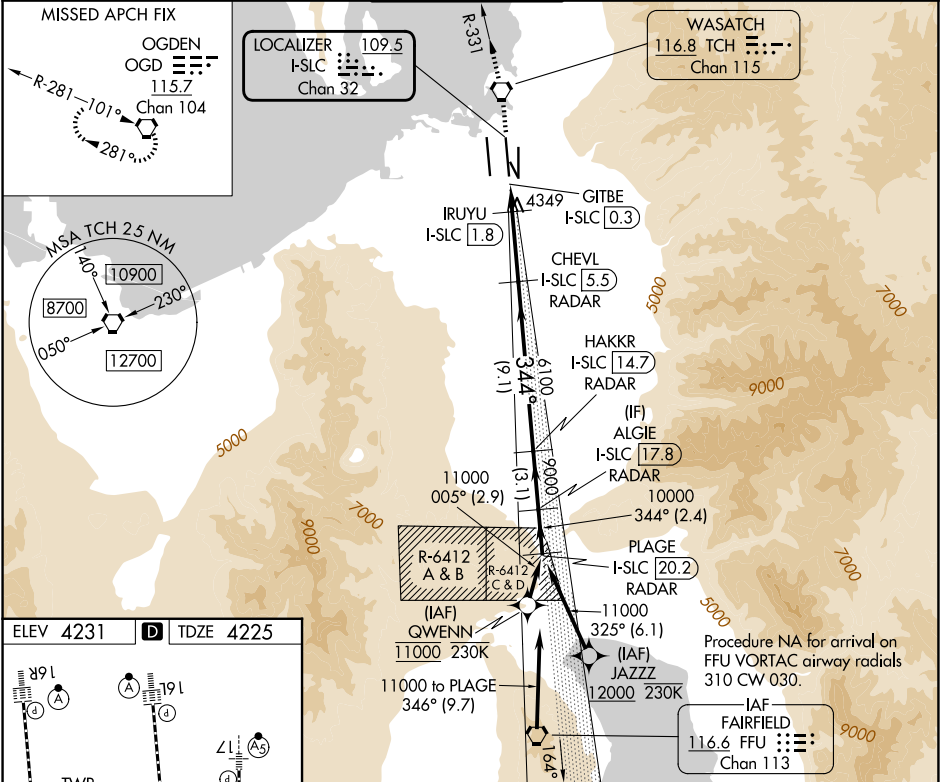

9000 TCH	OGD	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 73).		PLAGE
				ALGIE I-SLC [20.2]
TCH R-331				HAKKR I-SLC [14.7] RADAR
				CHEVL I-SLC [5.5] RADAR
I-SLC DME ANTENNA				IRUYU I-SLC [1.8]
				GITBE I-SLC [0.3]
				4900
				6100
				9000
				11000
				GS 3.00° TCH 55
CATEGORY	A	B	C	D
S-ILS 34R	4425/18 200 (200-½)			
S-LOC 34R	4600/24 375 (400-½) 4600/35 375 (400-¾)			