

WAAS
CH **77517**
W03A

APP CRS
038°

Rwy Ldg
TDZE **1917**
Apt Elev **1919**

RNAV (GPS) RWY 3

SAN ANGELO RGNL/MATHIS FLD (SJT)

RNP APCH - GPS.

▼

▲


ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C.
For inop ALS, increase LPV Cat E visibility to RVR 4000, and LNAV/VNAV Cat E and LNAV Cat E visibility to RVR 6000. Circling NA for Cat E west of Rwy 18-36.
RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH:
Climb to 3800 direct LITAZ and hold.

ATIS 128.45 319.0	SAN ANGELO APP CON ★ 125.35 354.1	MATHIS TOWER ★ 118.3(CTAF) 284.7	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	---	--	-------------------------------	-------------------------

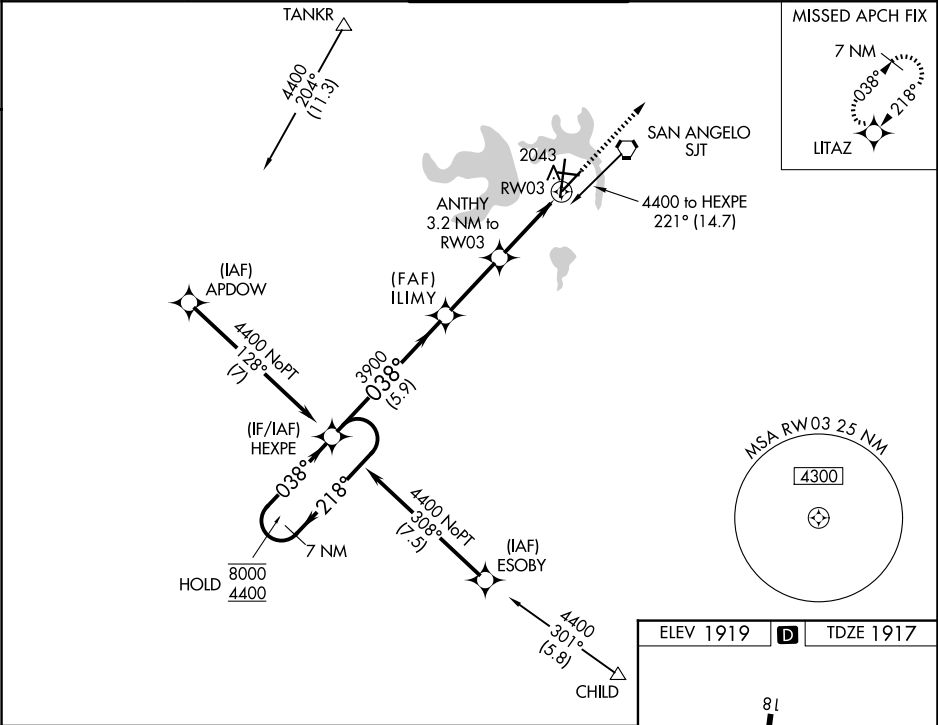

7 NM Holding Pattern					
HEXPE ILIMY ANTHY 3800 LITAZ					
8000 4400 GP 3.00° TCH 51					
218° 038° 038° 3900 3000 3900 3000 3900 3000 3900 3000					
5.9 NM 2.8 NM 2.2 NM 1 NM					
CATEGORY	A	B	C	D	E
LPV DA #	2117/24		200 (200-½)		
LNAV/VNAV DA	2323/35		406 (500-¾)		
LNAV MDA	2300/24	383 (400-½)	2300/35 383 (400-¾)		
CIRCLING	2360-1 441 (500-1)	2380-1 461 (500-1)	2500-1½ 581 (600-1½)	2700-2½ 781 (800-2½)	2700-2¾ 781 (800-2¾)

