

SAN ANTONIO, TEXAS

WAAS CH 52296 W16A	APCH CRS 158°	Rwy ldg TDZE Arpt Elev	11,550 690 690
--------------------------	------------------	------------------------------	----------------------

(USAF)

RNAV (GPS) RWY 16

KELLY FLD (KSKF)

RNP APCH

- ▼ * When ALS inop, increase RVR to 40, vis to 3/4 miles.
** When ALS inop, increase RVR to 55, vis to 1 mile.
*** When ALS inop, increase CAT AB RVR to 55, and vis to 1 mile;
CAT CDE RVR to 60 vis to 1 1/8 miles.

ALSF-1




MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct FITER and hold.

ATIS 120.45 273.5	SAN ANTONIO APP CON 118.05 353.5	KELLY TOWER 124.3 322.35	GND CON 121.8 289.4
----------------------	-------------------------------------	-----------------------------	------------------------

**** Circling not authorized
E of Rwy 16-34.

For uncompensated
BARO-VNAV systems,
LNAV/VNAV NA below -16°C
(3°F) or above 54°C (129°F).

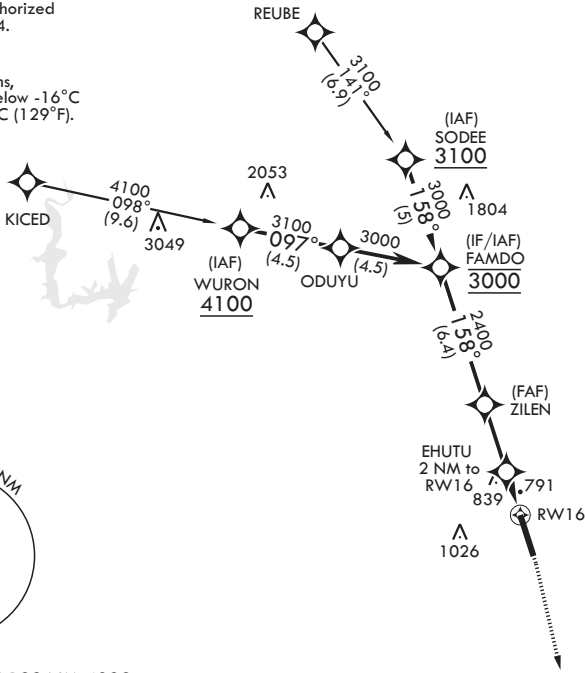

EMERG SAFE ALT 100 NM 4200

FAMDO		VGSI and descent angles not coincident (VGSI Angle 3.01/TCH 89).		1500	3000	FITER	ELEV 690	158°	TDZE 690
3000	158°	ZILEN	EHUTU 2 NM to RW16	1360	1 NM to RW16	RW16			
GP 3.00°	TCH 57								
		3.1 NM	2 NM						
CATEGORY	A	B	C	D	E				
LPV DA*	890/24		200	(200-½)					
LNAV/VNAV DA**	1065/35		375	(400-¾)					
LNAV MDA***	1100/24	410 (500-½)	1100/40	410	(500-¾)				
CIRCLING****	1200-1 510 (600-1)	1280-1 590 (600-1)	1340-1¼ 650 (700-1¼)	1900-3 1210 (1300-3)					

HIRL all rwys

SAN ANTONIO, TEXAS

29°23'N - 98°35'W

KELLY FLD (KSKF)

Amdt 3 04SEP25

RNAV (GPS) RWY 16

SC-3, 25 DEC 2025 to 22 JAN 2026

SC-3, 25 DEC 2025 to 22 JAN 2026