

WAAS CH 69435 W15A	APP CRS 149°	Rwy Ldg TDZE 166 Apt Elev 166	8014
--	------------------------	---	-------------


RNAV (GPS) RWY 15

CRAIG FLD (SEM)

⚠ Baro-VNAV NA when using Montgomery altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Montgomery altimeter setting. When local altimeter setting not received, use Montgomery altimeter setting and increase all DA 78 feet, all MDA 80 feet, LPV all Cats visibility ¾ mile, LNAV/VNAV all Cats visibility and LNAV Cats C and D visibility ¼ mile, Circling Cat C visibility ½ mile and Cat D visibility ¼ mile.

MISSED APPROACH:
Climb to 3100 direct
CADIP and hold.

AWOS-3PT 119.15	MONTGOMERY APP CON ★ 124.0 363.025	CRAIG TOWER★ 120.85	GND CON 121.675	UNICOM 122.7 (CTAF) 0
---------------------------	--	-------------------------------	---------------------------	---------------------------------

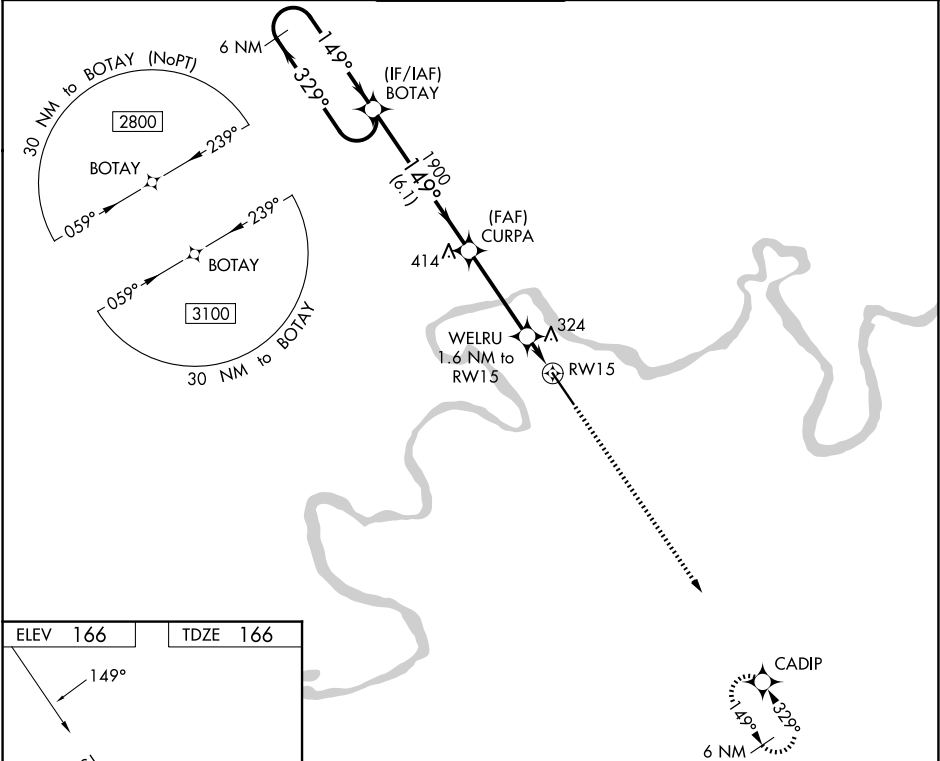

ELEV 166

TDZE 166

6 NM Holding Pattern BOTAY

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50).

3100 CADIP

2800	329°	149°	1900	149°	720	1.1 NM to RW15	*LNAV only
GP 3.00°							
TCH 45							
	6.1 NM	3.7 NM	0.5 NM	1.1 NM			

CATEGORY	A	B	C	D
LPV DA		416-¾	250 (300-¾)	
LNAV/VNAV DA		569-1⅓	403 (500-1⅓)	
LNAV MDA	560-1	394 (400-1)	560-1⅓	394 (400-1⅓)
CIRCLING	660-1 494 (500-1)	760-1 594 (600-1)	760-1½ 594 (600-1½)	1040-2¾ 874 (900-2¾)

HIRL Rwy 15-33 0

CRAIG FLD (SEM)

SE-4, 25 DEC 2025 to 22 JAN 2026

SE-4, 25 DEC 2025 to 22 JAN 2026