

LOC I-FSD 109.9	APP CRS 030°	Rwy Ldg 8999 TDZE 1424 Apt Elev 1430
---------------------------	------------------------	---

ILS or LOC RWY 3
JOE FOSS FLD (FSD)

JOE FOSS FLD (FSD)

ADF or RADAR required.





For inop ALS, increase S-LOC 3 Cats C/D visibility to $1\frac{7}{8}$ SM, and S-LOC 3 MAREY fix minimums Cats C/D to $1\frac{3}{8}$ SM.



MISSED APPROACH: Climb to 3400 then left turn direct FSD VORTAC and hold.

ATIS 126.6	SIoux FALLS APP CON ★ 125.8 284.725	SIoux FALLS TOWER ★ 118.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
---------------	--	---	------------------------	------------------

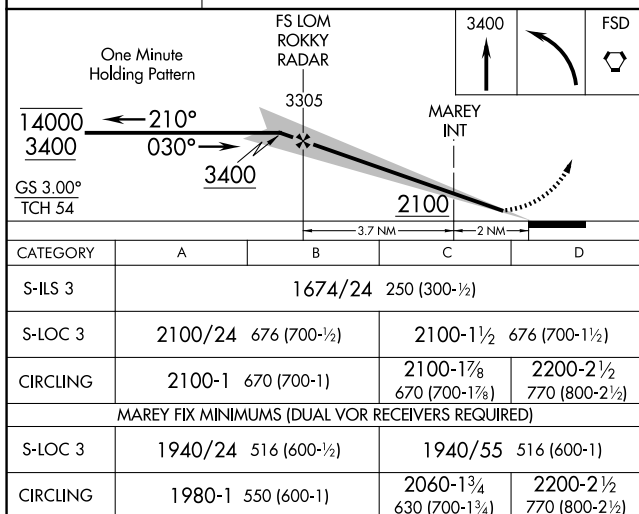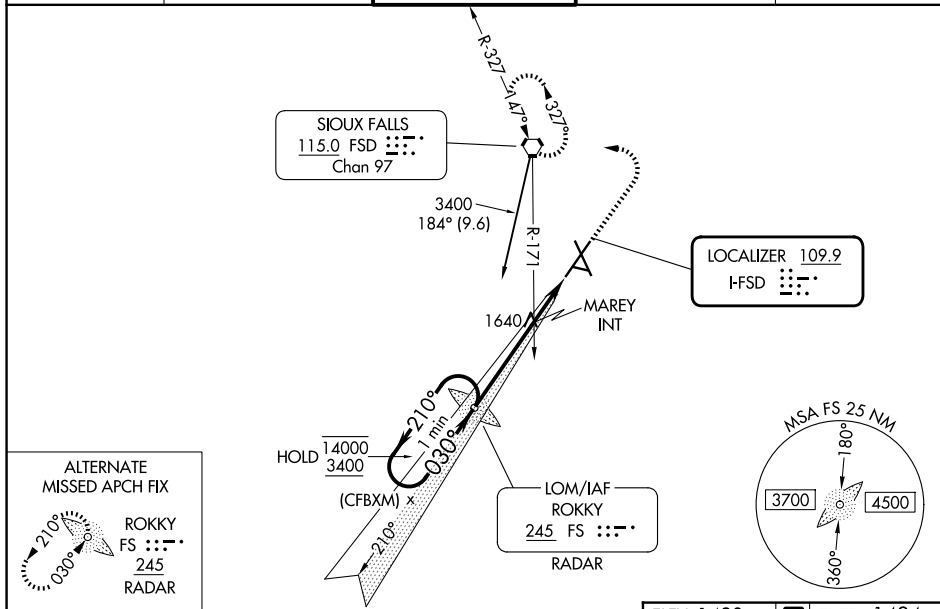

FAF to MAP 5.7 NM		60	90	120	150	180
Knots		60	90	120	150	180
Min:Sec		5:42	3:48	2:51	2:17	1:54

ILS or LOC RWY 3