

(ENDE2.ENED) 25219

AL-416 (FAA)

TAMPA INTL (TPA)
TAMPA, FLORIDA

ENED TWO DEPARTURE (RNAV)

TAMPA DEP CON
118.8 239.3
D-ATIS
128.475
CLNC DEL
133.6
CPDLC
GND CON
121.7 269.4
TAMPA TOWER
119.5 269.4

RNAV 1 - DME/DME/IRU or GPS required.

RADAR required




**TOP ALTITUDE:
6000**

TAKEOFF MINIMUMS

Rwys 1L/R, 19R, 28: Standard.

Rwy 10: Standard with minimum climb of 240'/NM to 800.

Rwy 19L: Standard with minimum climb of 230'/NM to 300.

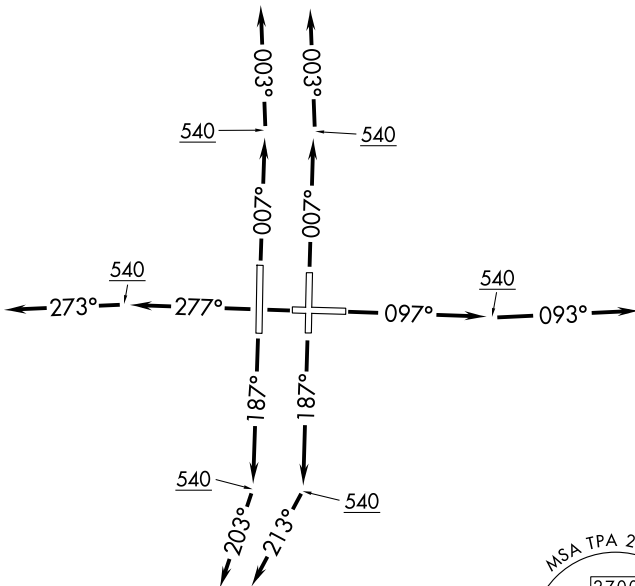

NOTE: Jet aircraft only.

NOTE: Chart not to scale. (CONTINUED ON FOLLOWING PAGE)

ENED TWO DEPARTURE (RNAV)

(ENDE2.ENED) 16MAY24

TAMPA, FLORIDA
TAMPA INTL (TPA)

SE-3, 25 DEC 2025 to 22 JAN 2026

SE-3, 25 DEC 2025 to 22 JAN 2026

ENDED TWO DEPARTURE (RNAV)



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 1L/R: Climb on heading 007° to 540, then on heading 003° for vectors to ENDED thence

TAKEOFF RUNWAY 10: Climb on heading 097° to 540, then on heading 093° for vectors to ENDED thence

TAKEOFF RUNWAY 19L: Climb on heading 187° to 540, then on heading 213° for vectors to ENDED thence

TAKEOFF RUNWAY 19R: Climb on heading 187° to 540, then on heading 203° for vectors to ENDED thence

TAKEOFF RUNWAY 28: Climb on heading 277° to 540, then on heading 273° for vectors to ENDED thence

. . . . on track 357° to LACEN. Maintain 6000. Expect clearance to filed altitude within ten minutes after departure.

SE-3, 25 DEC 2025 to 22 JAN 2026

SE-3, 25 DEC 2025 to 22 JAN 2026