


WAAS CH 53511 W12A	APP CRS 118°	Rwy Ldg TDZE Apt Elev	7314 23 24
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 12R
VERO BEACH RGNL (VRB)



T Circling to Rwy 30R NA at night. Baro-VNAV NA when using Fort Pierce altimeter setting. **A** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F), DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Pierce altimeter setting and increase LPV DA to 302 feet; increase LNAV/VNAV DA to 317 feet; increase all MDAs 40 feet and LNAV Cat C/D visibility $\frac{1}{8}$ SM and Circling Cat C/D visibility $\frac{1}{4}$ SM.

MISSED APPROACH:
Climb to 2000 direct
PUUMA and hold.

ATIS 120.575	PALM BEACH APP CON 123.625 225.4 (N)	VERO BEACH TOWER ★ 126.3 (CTAF) 0	GND CON 127.45	UNICOM 122.95
-----------------	---	--------------------------------------	-------------------	------------------

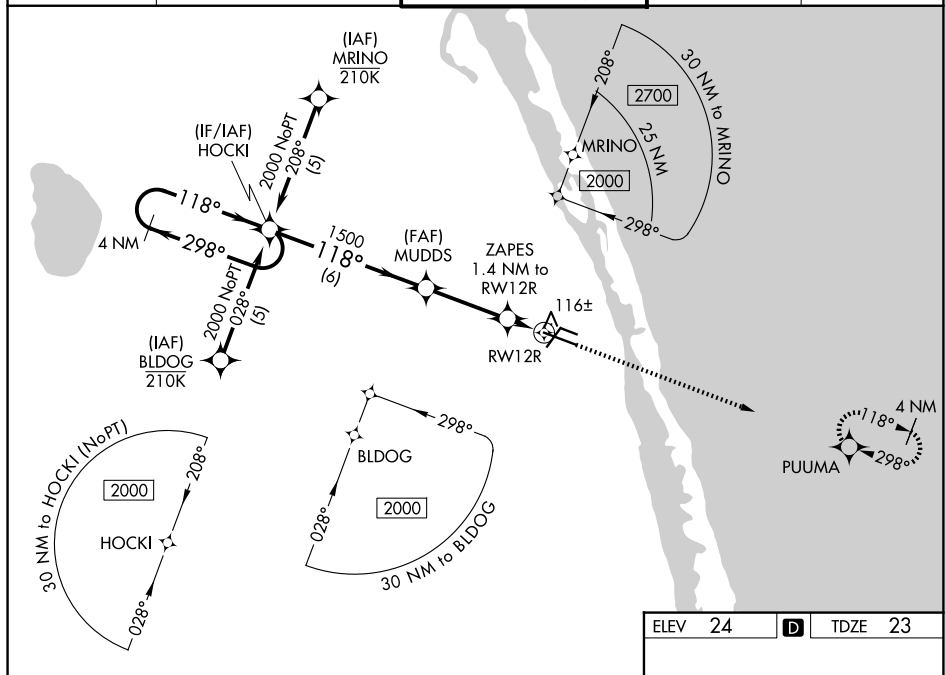

ELEV	24	D	TDZE	23
------	----	----------	------	----

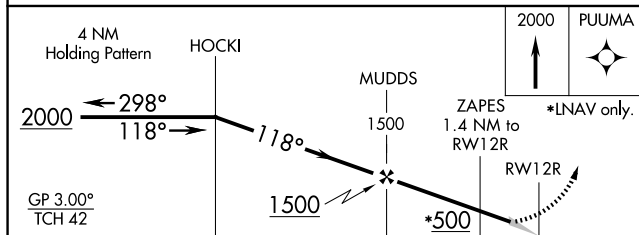

CATEGORY		A		B		C		D	
LPV	DA			279- ³ / ₄		256 (300- ³ / ₄)			
INAV/ VNAV	DA			294- ⁷ / ₈		271 (300- ⁷ / ₈)			
INAV	MDA			380-1		357 (400-1)			
CIRCLING		560-1	536 (600-1)			660- ¹³ / ₄ 636 (700- ¹³ / ₄)	820-2 ¹ / ₂ 796 (800-2 ¹ / ₂)		

MIRL Rwy 4-22, 12R-30L,
and 12L-30R **L**
REIL Rwy 4, 12R, 22 and 30L **L**