
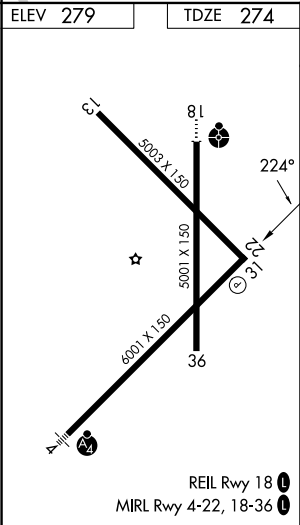


WAAS CH 82125 W22A	APP CRS 224°	Rwy Ldg TDZE 274 Apt Elev 279	RNAV (GPS) RWY 22 WALNUT RIDGE RGNL (ARG)
--	------------------------	---	---

⚠ Baro-VNAV NA when using Jonesboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. VDP NA with Jonesboro altimeter setting. When local altimeter setting not received, use Jonesboro altimeter setting and increase LPV and LNAV/VNAV DA to 578 feet, and all MDAs 60 feet; increase LNAV Cats C/D visibility ½ SM and Circling Cat D visibility ¼ SM.

MISSED APPROACH:
Climb to 2700 direct XIHAM and hold.

AWOS-3PT 126.525	MEMPHIS CENTER 120.075 289.4	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

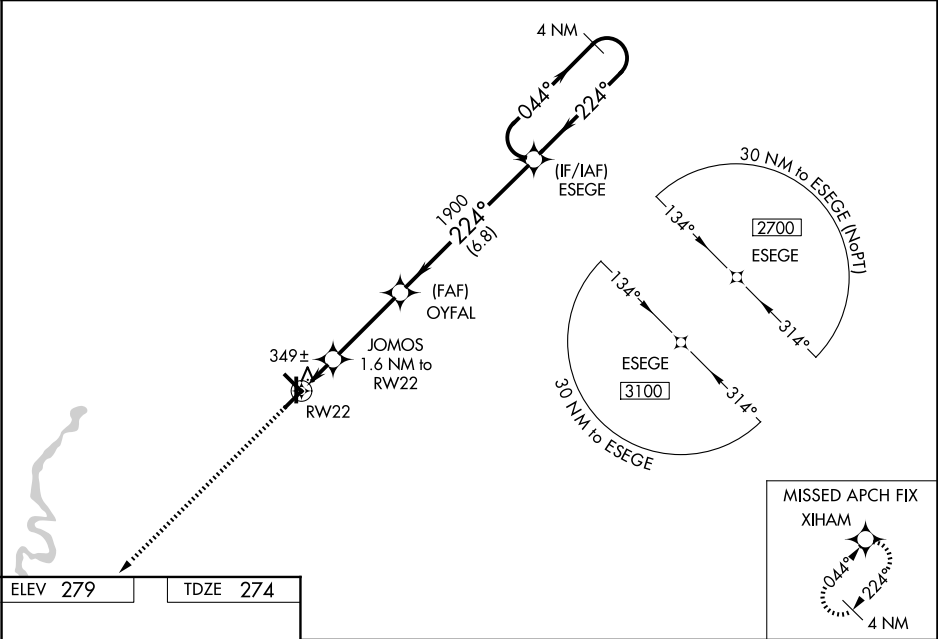

2700 XIHAM	JOMOS 1.6 NM to RW22	OYFAL 1900	ESEGE 4 NM Holding Pattern	2700
*LNAV only.	*0.9 NM to RW22	820*	1900	GP 3.00° TCH 45
0.9 NM	0.7 NM	3.4 NM	6.8 NM	
CATEGORY	A	B	C	D
LPV DA		524-1	250 (300-1)	
LNAV/VNAV DA		524-1	250 (300-1)	
LNAV MDA		600-1	326 (400-1)	
CIRCLING	760-1	481 (500-1)	800-1½ 521 (600-1½)	1000-2¼ 721 (800-2¼)