

WAAS CH 97317 W10A	APP CRS 099°	Rwy Ldg 8151 TDZE 16 Apt Elev 20
--	------------------------	---

RNAV (GPS) Y RWY 10L
PALM BEACH INTL (PBI)

RNP APCH - GPS.



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 6°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500 and increase LNAV Cats C/D visibility to RVR 6000.


RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR




MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct MORG and hold.

D-ATIS 123.75	PALM BEACH APP CON 128.3 317.4	PALM BEACH TOWER 119.1 257.8	GND CON 121.9 284.6	CLNC DEL 121.6 284.6	CPDLC
-------------------------	--	--	-------------------------------	--------------------------------	-------

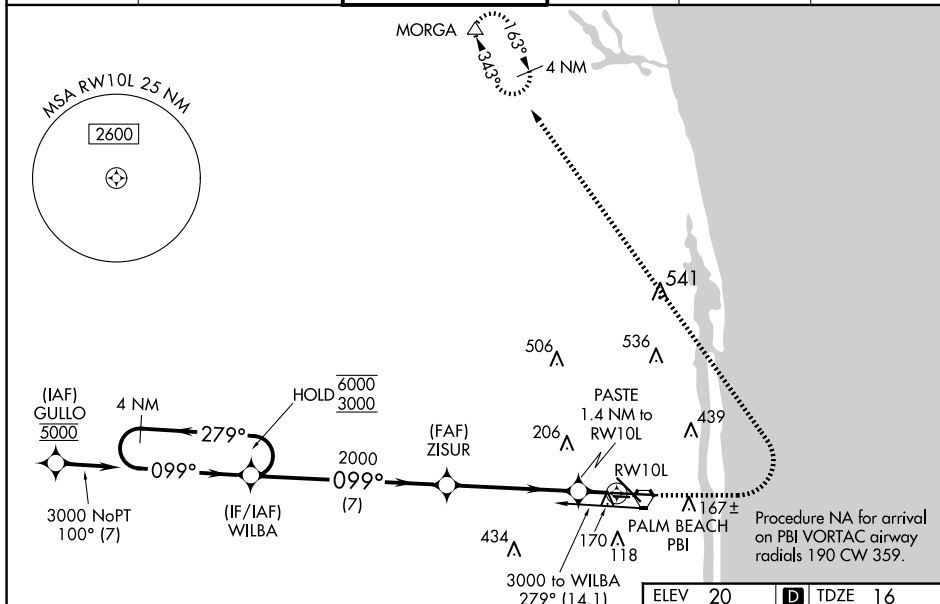


VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 68).

4 NM
Holding Pattern

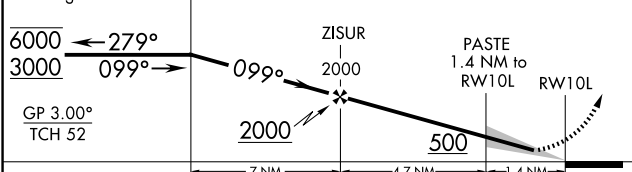

CATEGORY	A	B	C	D
LPV DA #	216/24	200 (200-½)		
RNAV/ VNAV DA	392/35	376 (400-¾)		
RNAV MDA	420/24	404 (400-½)	420/40	404 (400-¾)
C CIRCLING	560-1	540 (600-1)	740-2 720 (800-2)	780-2½ 760 (800-2½)

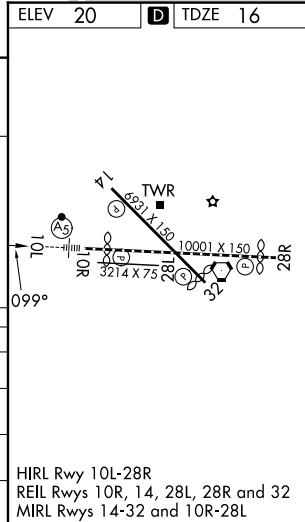

RNAV (GPS) Y RWY 10L