

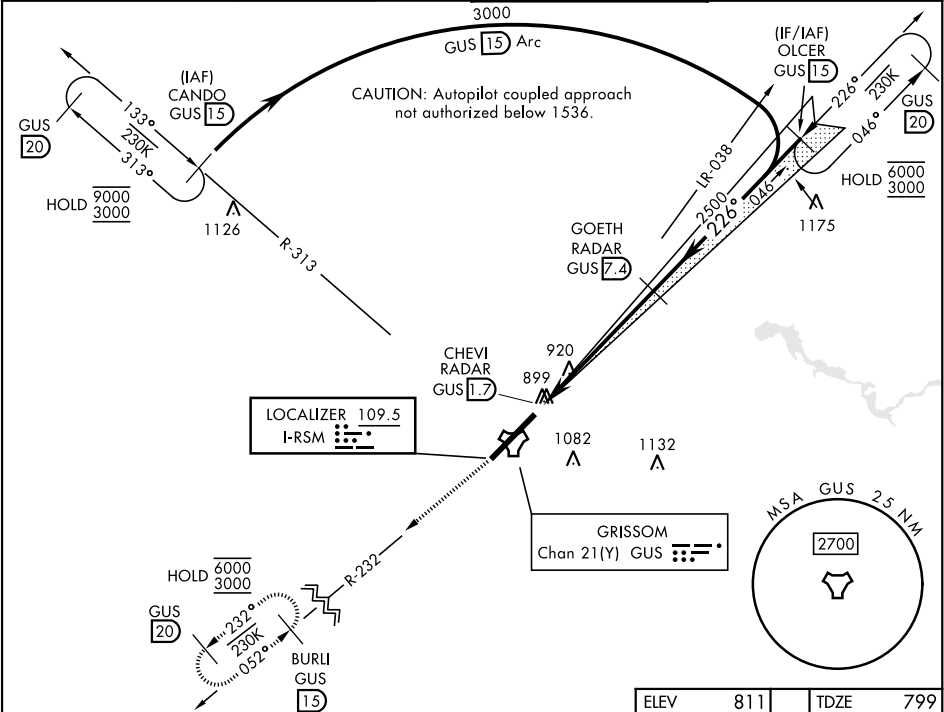


ILS or LOC RWY 23

LOC I-RSM 109.5	APCH CRS 226°	Rwy Idg 12,501 TDZE 799 Arpt Elev 811	[USAF]	GRISSOM ARB (KGUS)
RADAR, TACAN required			MISSED APPROACH: Climb to 3000 on the GUS TACAN R-232 to BURLI and hold. Missed approach requires use of RNAV or ATC RADAR monitoring.	
*When ALS inop, increase RVR to 40 and vis to ¾ mile. ** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1½ miles.			ALSIF-1 	
ATIS 132.55 270.8	APP CON 121.05 351.8 (E) 123.85 291.675 (W)	TOWER ★ 133.7 290.45	GND CON 128.425 275.8	

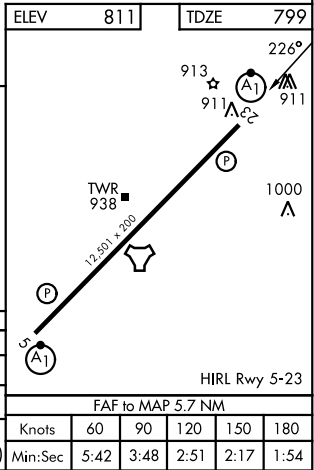

EMERG SAFE ALT 100 NM 3500

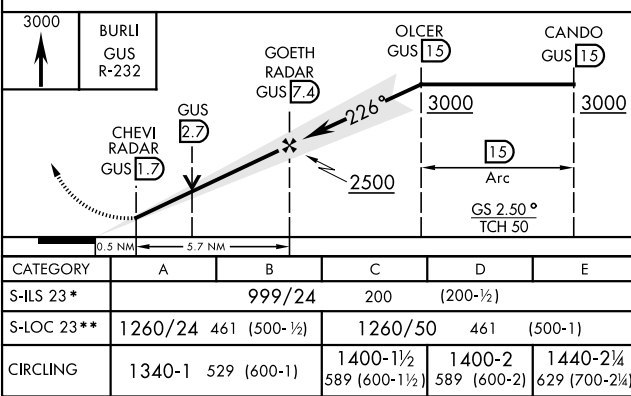

ILS or LOC RWY 23

EC-2, 25 DEC 2025 to 22 JAN 2026

EC-2, 25 DEC 2025 to 22 JAN 2026