

WAAS CH 70419 W22A	APP CRS 222°	Rwy Ldg TDZE 4310 Apt Elev 4314
--	------------------------	---

RNAV (GPS) RWY 22

DEMING MUNI (DMN)

RNP APCH - GPS.


▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 40°C. Baro-VNAV NA when using Las Cruces altimeter setting. When local altimeter setting not received, use Las Cruces altimeter setting and increase all DA 114 feet and all MDA 120 feet; increase LPV and LNAV/VNAV all Cats visibility ¼ mile, increase LNAV Cats C and D visibility ¼ mile, increase Circling Cat B visibility ¼ mile and Circling Cats C and D visibility ½ mile. Rwy 22 helicopter visibility reduction below 1 SM NA. Straight-in Rwy 22 NA at night, Circling Rwy 22, 26 NA at night.

MISSED APPROACH:
Climb to 9000 direct GINEC and on track 274° to FAAST and hold.

ASOS 118.525	ALBUQUERQUE CENTER 128.2 285.5	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------------

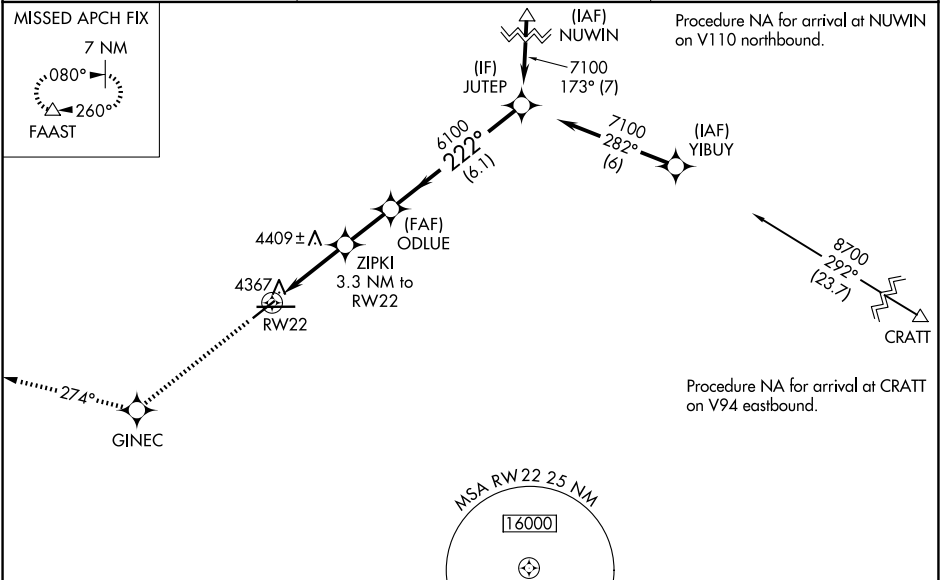

R-5115				ELEV 4314		TDZE 4310	
9000 ↑	GINEC ✱	tr 274°	FAAST △	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 44).		JUTEP	
RW22		ZIPKI 3.3 NM to RW22	6100	222°	7100	Procedure Turn NA	
5400			6100		GP 3.00° TCH 52		
3.3 NM		2.1 NM	6.1 NM				
CATEGORY	A	B	C	D			
LPV DA	4560-1			250 (300-1)			
LNAV/ VNAV DA	4637-1¼			327 (400-1¼)			
LNAV MDA	4660-1			350 (400-1)		4660-1¼ 350 (400-1¼)	
CIRCLING	4820-1 506 (600-1)	4940-1 626 (700-1)	5020-2 706 (800-2)	5020-2¼ 706 (800-2¼)		5020-2¼ 706 (800-2¼)	
						MIRL Rwy 4-22 MIRL Rwy 8-26 ①	