


TACAN RWY 13

TACAN CVS Chan 53	APCH CRS 120°	Rwy Idg 8194 TDZE 4294 Arpt Elev 4295	[USAF]	CANNON AFB (KCVS)
Missed approach requires use of RNAV or RADAR monitoring.			SSALR (A3)	MISSED APPROACH: Climb to 6000 out CVS TACAN R-130 to 5.6 DME (HOMEP) then turn right climbing to 7000 intercept CVS R-193 to 12 DME (CLINK) and hold.
▼ * When ALS inop, increase CAT AB vis to 1 mile, CAT CDE vis to 1¾ miles.				
ATIS 119.1 269.9	CANNON APP CON 118.425 352.1	CANNON TOWER 120.4 270.25	GND CON 121.9 275.8	CLNC DEL 120.2 293.225

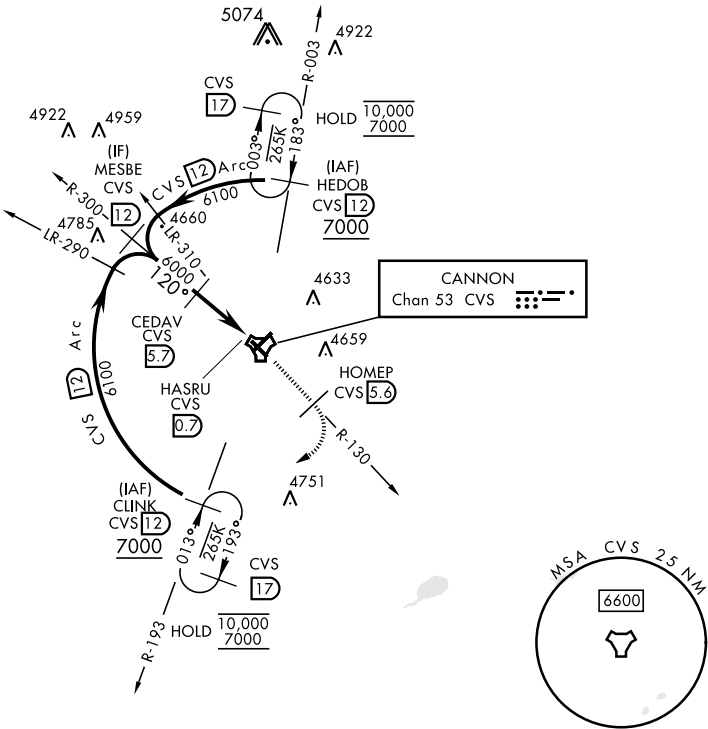

EMERG SAFE ALT 100 NM 9000

The diagram illustrates the TACAN RWY 13 approach. Key features include:

- Navigation Aids:** MESBE CVS (12), CEDAV CVS (5.7), HASRU CVS (0.7), and TACAN (2.1).
- Altitudes:** 6100, 6000, 506, 4800-1, 4840-1, 4860-1½, 5000-2¼, 5020-2½, 565 (600-1½), 705 (800-2¼), 725 (800-2½).
- Distances:** 3.13° TCH 37, 5 NM, 0.1.
- Obstacles:** 6000 CVS R-130, HOME P CVS (5.6), 7000, CLINK CVS (12).
- Other:** 120° bearing, 120° turn, 120° turn, 120° turn.

CATEGORY	A	B	C	D	E
S-13*	4800-¾	506 (600-¾)	4800-1	506	(600-1)
CIRCLING	4840-1	545 (600-1)	4860-1½ 565 (600-1½)	5000-2¼ 705 (800-2¼)	5020-2½ 725 (800-2½)

The diagram illustrates the HIRL all rwys approach. Key features include:

- Navigation Aids:** 4421, 4433, 4327 TWR, 4437.
- Altitudes:** 4525, 4421, 4433, 4327, 4437, 8124 x 150, 678 DOWN.
- Distances:** 10,600 x 150, 678 DOWN.
- Other:** 120° bearing, 120° turn, 120° turn, 120° turn.

HIRL all rwys

TACAN RWY 13

SW-1, 25 DEC 2025 to 22 JAN 2026

SW-1, 25 DEC 2025 to 22 JAN 2026