

WAAS CH 48813 W05A	APP CRS 054°	Rwy Ldg 10000 TDZE 384 Apt Elev 435
--	------------------------	--

RNAV (GPS) Y RWY 5L

RALEIGH-DURHAM INTL (RDU)

RNP APCH-GPS.

⚠


Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500. Use of FD or AP required during simultaneous operations.

MALSR

⚠

MISSED APPROACH: Climb to 1000 then climbing left turn to 2200 direct DUHAM and hold.

D-ATIS 123.8	RALEIGH APP CON 127.675 307.9	RALEIGH TOWER 127.45 257.8	GND CON 121.9 348.6	CLNC DEL 120.1	CPDLC
------------------------	---	--------------------------------------	-------------------------------	--------------------------	-------

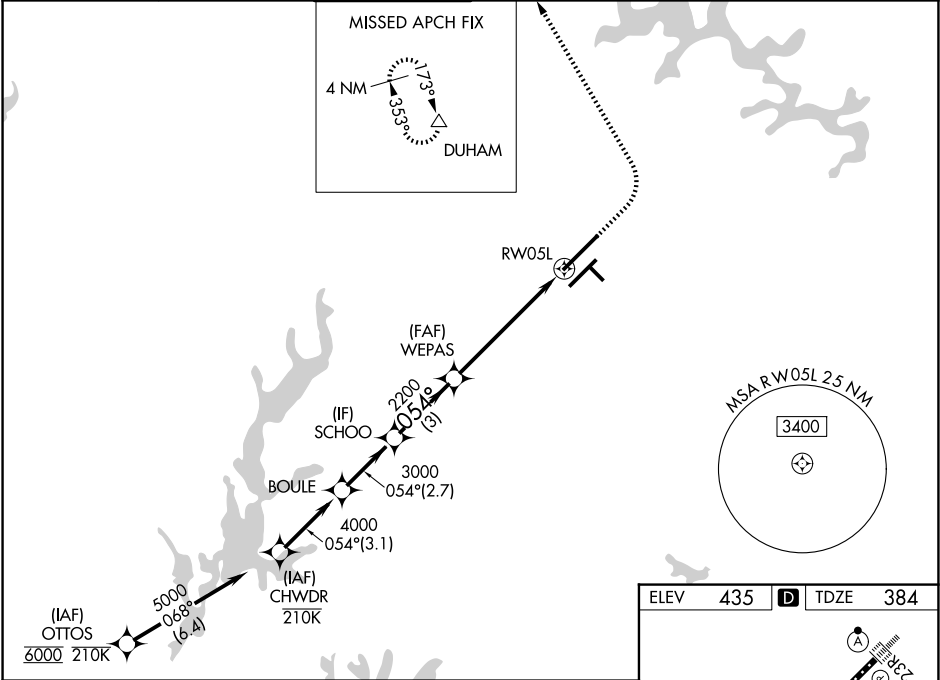

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).				
CHWDR BOULE SCHOO WEPAS RW05L				
5000 054° 4000 3000 2200 2200 1000 2200 DUHAM				
GP 3.00° TCH 57				
3.1 NM 2.7 NM 3 NM 4.3 NM 1.3 NM				
CATEGORY	A	B	C	D
LPV DA	598/18		214 (200-½)	
LNAV/VNAV DA	748/35		364 (400-¾)	
LNAV MDA	840/24	456 (500-½)	840/45	456 (500-¾)
CIRCLING	960-1	525 (600-1)	1020-1½ 585 (600-1½)	1180-2½ 745 (800-2½)

