


VORTAC SPI	APP CRS	Rwy Ldg	7927
112.7	055°	TDZE	592
Chan 74		Apt Elev	598

VOR RWY 4


ABRAHAM LINCOLN CAPITAL (SPI)

DME required.		MALSR	MISSED APPROACH: Climb to 1500 then climbing left turn to 2500 on heading 325° and on SPI VORTAC R-355 to GROWL/14.7 DME and hold.
ASR	VDP NA when using AAA altimeter setting. When local altimeter setting not received, use AAA altimeter setting; increase all MDAs 60 feet and Circling Cat C/D visibility ¼ SM. For inop ALS, increase S-4 Cat C/D visibility to RVR 5500.		

ATIS	SAINT LOUIS APP CON *	SPRINGFIELD TOWER *	GND CON	UNICOM
127.65 270.1	126.15 323.0	121.3 (CTAF) 0 257.8	121.9 348.6	122.95

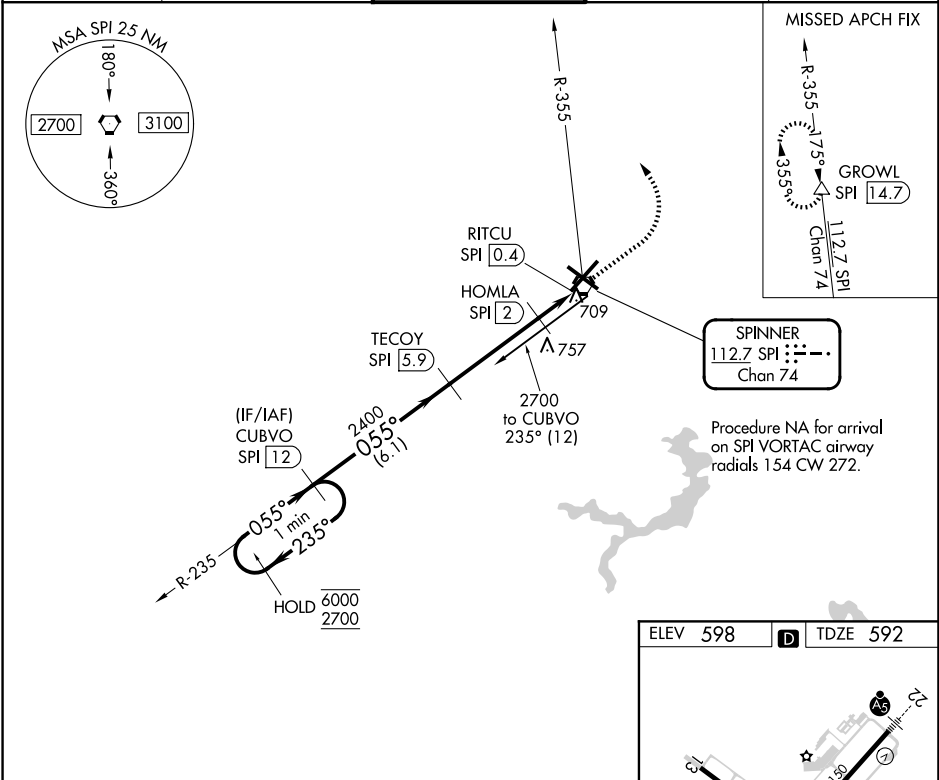

One Minute Holding Pattern	CUBVO SPI 12		TECOY SPI 5.9	1500	2500	SPI R-355	GROWL
	6000	2700	2400	1140	0.6	1 NM	
CATEGORY	A	B	C	D			
S-4	960/24	368 (400-½)	960/40	368 (400-¾)			
CIRCLING	1040-1 442 (500-1)	1100-1 502 (600-1)	1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)			

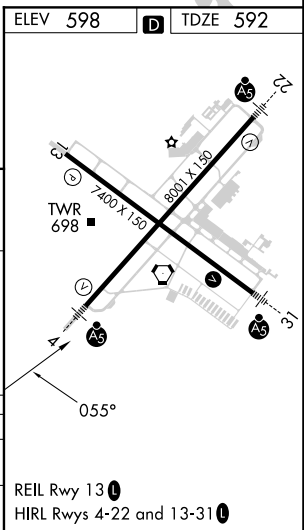

EC-3, 25 DEC 2025 to 22 JAN 2026

EC-3, 25 DEC 2025 to 22 JAN 2026