
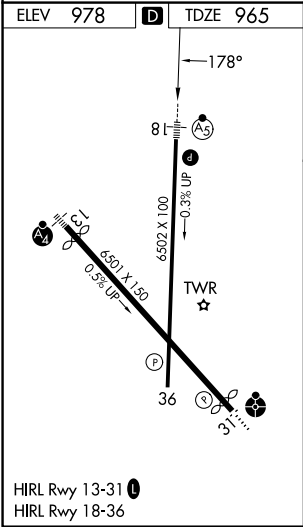


WAAS CH 97309 W18A	APP CRS 178°	Rwy Ldg TDZE 965 Apt Elev 978
--	------------------------	---

RNAV (GPS) RWY 18

JOPLIN RGNL (JLN)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 54°C (130°F). For inoperative MALSR, increase LPV all Cats visibility to RVR 5000.			MALSR 	MISSED APPROACH: Climb to 3100 direct JEMLO and hold.
ATIS 120.85	KANSAS CITY CENTER 128.6 282.325	JOPLIN TOWER* 119.8 (CTAF) 0	GND CON 121.6	UNICOM 122.95

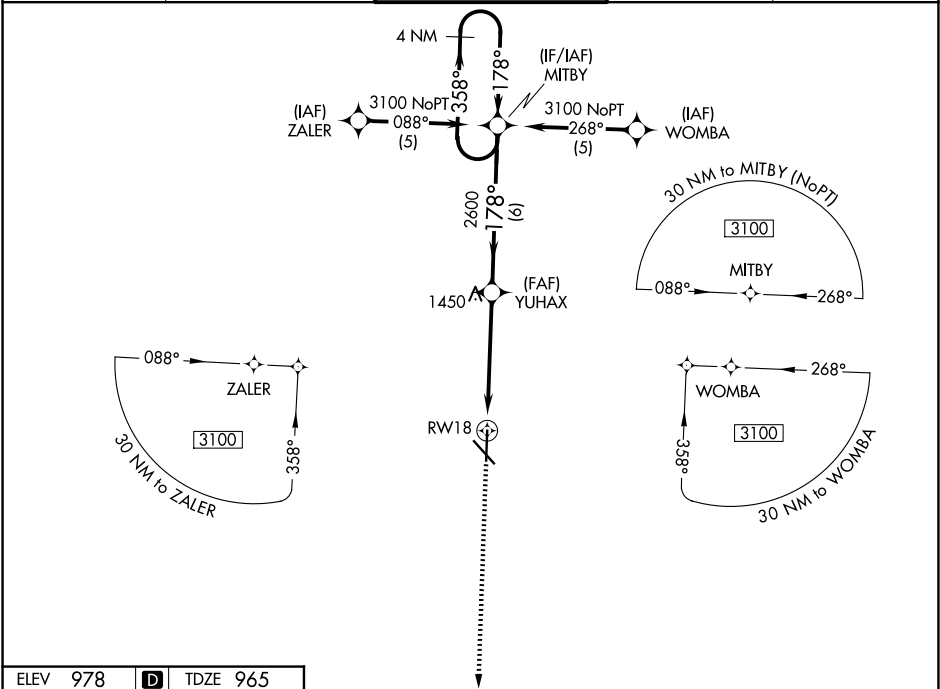

3100	JEMLO	*LNAV only.	YUHAX	MITBY	4 NM Holding Pattern
		*1.9 NM to RWY18			
					GP 3.00° TCH 46
CATEGORY		A	B	C	D
LPV DA		1220/24		255 (300-½)	
LNAV/VNAV DA		1460/60		495 (500-1¼)	
LNAV MDA		1600/24 635 (700-½)		1600/60 635 (700-1¼)	1600-1½ 635 (700-1½)
CIRCLING		1600-1¾ 622 (700-1¾)		1600-2 622 (700-2)	

NC-3, 25 DEC 2025 to 22 JAN 2026

NC-3, 25 DEC 2025 to 22 JAN 2026