



LOC/DME I-RTH	APP CRS	Rwy Ldg
111.5	314°	8486
Chan 52		TDZE 13
		Apt Elev 13

ILS or LOC RWY 31R

JOHN F KENNEDY INTL (JFK)

RADAR required for procedure entry.	MALSR	MISSED APPROACH: Climb to 1800 then climbing left turn to 4000 on LGA VOR/DME R-207 to MOVFA INT/LGA 34.3 DME and hold.
Simultaneous approach authorized.		

(SW)	D-ATIS (NE)	NEW YORK APP CON	KENNEDY TOWER	GND CON
115.4	117.7 128.725	128.125 269.0	119.1 281.55 (4R/22L and 13L/31R) 123.9 281.55 (4L/22R and 13R/31L)	121.9 348.6

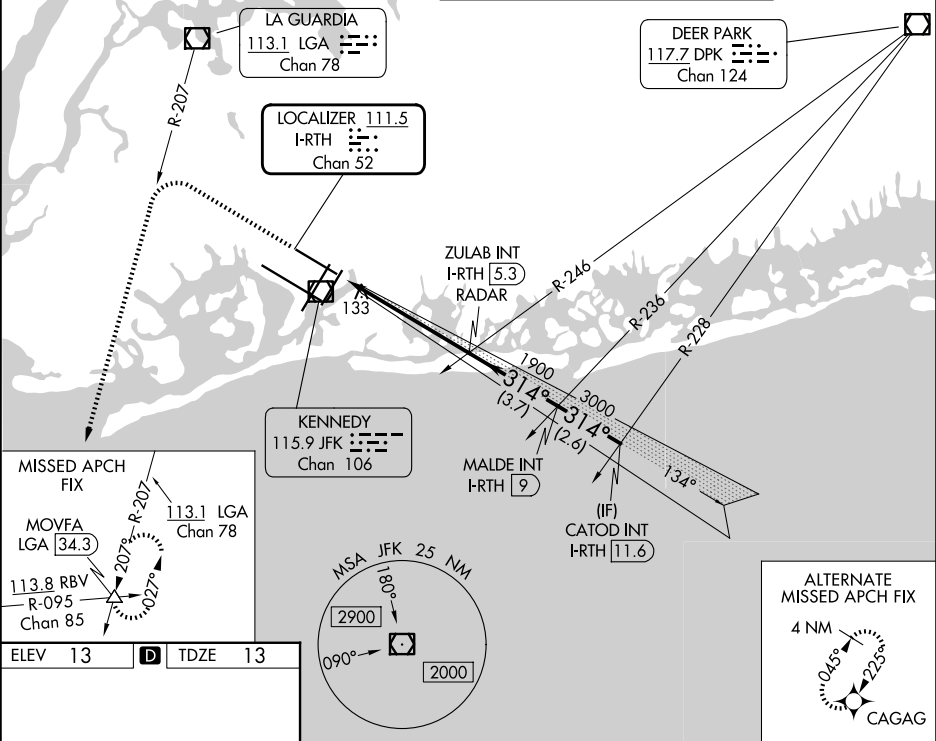

RLS Rwy's 13L and 13R					
HIRL all Rwy's					
TDZ/CL Rwy's 4L, 4R, 13L, 22L and 31R					
FAF to MAP 5.7 NM					
Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54

CATEGORY	A	B	C	D
S-ILS 31R	212/18 200 (200-½)			
S-LOC 31R	440/24	428 (500-½)	440/40	428 (500-¾)
CIRCLING	640-1	627 (700-1)	680-1¾ 667 (700-1¾)	680-2 667 (700-2)