

WAAS CH 63147 W28A	APP CRS 280°	Rwy Ldg 9129 TDZE 588 Apt Elev 592
--	------------------------	---

RNAV (GPS) RWY 28
NIAGARA FALLS INTL (IAG)

RNP APCH - GPS.


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.
Rwy 28 helicopter visibility reduction below RVR 4000 not authorized.
Circling Rwy 6 NA at night.
Circling NA for Cat E southeast of Rwy 6-24.
Inop table does not apply to LPV all Cats.
For inop ALS, increase LNAV/VNAV visibility all Cats to RVR 4500, LNAV visibility all Cats to RVR 5500.

MALSRL

A5

MISSED APPROACH:
Climb to 1040 then climbing right turn to 3600 direct ZUPUV and hold, continue climb-in-hold to 3600.

ATIS 120.8 269.4	BUFFALO APP CON 126.5 317.6	NIAGARA TOWER ★ 118.5 (CTAF) 0 349.0	GND CON 125.3 275.8	UNICOM 122.95
----------------------------	---------------------------------------	--	-------------------------------	-------------------------

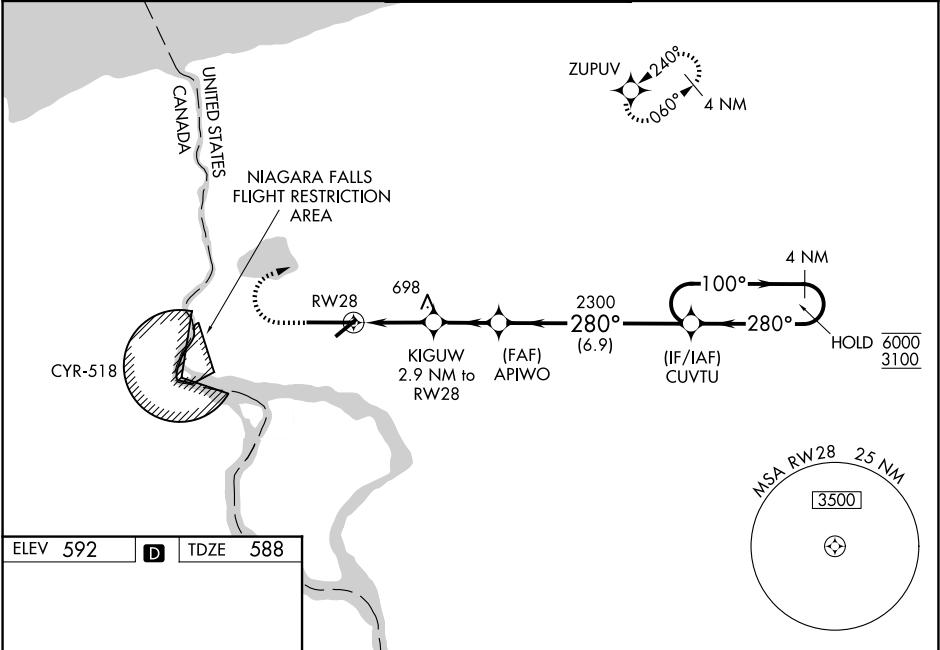

ELEV **592** **D** TDZE **588**

280°

1040 3600 ZUPUV

9826 X 150

5188 X 150

☆ TWR

1.2 NM to RW28

1.7 NM

2.3 NM

6.9 NM

1560

2300

APIWO

KIGUW 2.9 NM to RW28

CUVTU

100° → 6000

← 280° 3100

GP 3.00° TCH 55

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 2.50/TCH 67).

CATEGORY	A	B	C	D	E
LPV DA	838/40 250 (300-¾)				
LNAV/VNAV DA	957/40 369 (400-¾)				
LNAV MDA	960/40 372 (400-¾)				
CIRCLING	1100-1	508 (600-1)	1280-2 688 (700-2)	1280-2½ 688 (700-2½)	1280-2½ 688 (700-2½)

NE-2, 25 DEC 2025 to 22 JAN 2026

NE-2, 25 DEC 2025 to 22 JAN 2026