

WAAS CH 42807 W31B	APP CRS 309°	Rwy Idg 7202 TDZE 593 Apt Elev 612
--	------------------------	---

RNAV (GPS) RWY 31
MUSKOGEE-DAVIS RGNL (MKO)


⚠ For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 47°C (116°F). Baro-VNAV and VDP NA when using Tahlequah altimeter setting. When local altimeter setting not received, use Tahlequah altimeter setting: increase LPV DA to 934, LNAV/VNAV DA to 1230, and visibility LPV and LNAV/VNAV all Cats $\frac{1}{4}$ SM; increase all MDA 100 feet and visibility LNAV Cat C/D/E and Circling Cat C $\frac{1}{4}$ SM, and Circling Cat D $\frac{1}{2}$ SM. Inop table does not apply to LNAV/VNAV Cat A/B/C and LNAV Cat C. Circling Rwy 4, 18, 22, 36 NA at night. Rwy 4, 18, 22, 36 helicopter visibility reduction below 1 SM NA.

MALS

A₄

MISSED APPROACH:
Climb to 2900 direct
POKYO and hold.

ASOS 135.025	FORT WORTH CENTER 132.2 338.35	UNICOM 122.8 (CTAF) 1
-----------------	-----------------------------------	---------------------------------

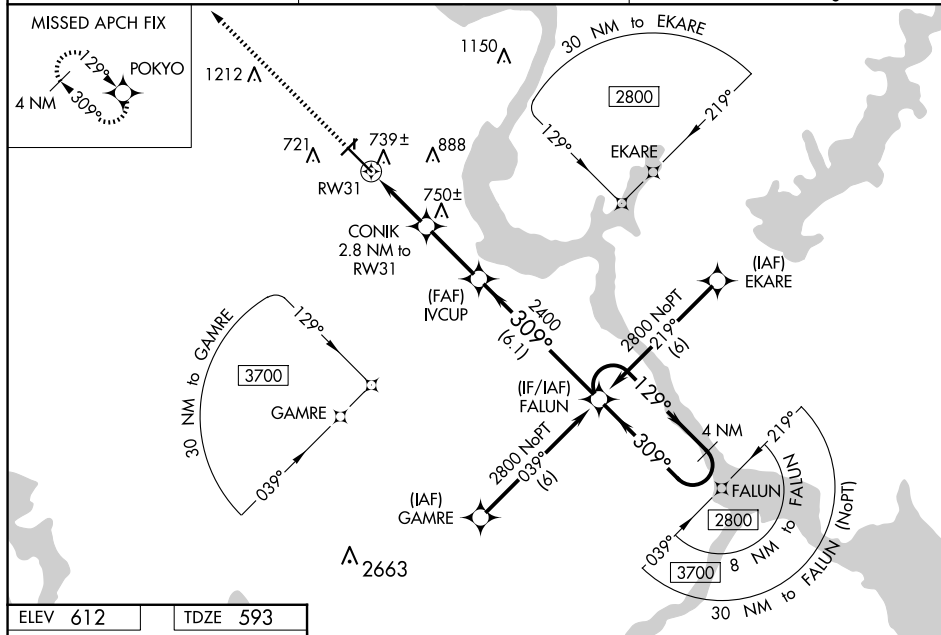

ELEV 612		TDZE 593
----------	--	----------

