


WAAS CH 60938 W05A	APP CRS 054°	Rwy Ldg TDZE 70 Apt Elev 79
--	------------------------	---

RNAV (GPS) RWY 5

NEW BEDFORD RGNL (EWB)

RNP APCH-GPS.				MALSR A5	MISSED APPROACH: Climb to 700 then climbing left turn to 2100 direct BONNI and hold.
Baro-VNAV and VDP NA when using Taunton altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Taunton altimeter setting and increase LPV DA to 304 feet, increase LNAV/VNAV DA to 487 feet and all visibilities to RVR 5000; increase all MDA 40 feet and LNAV Cats C/D visibility to RVR 5000. For inop MALSR, when using Taunton altimeter setting, increase LPV all Cats visibility to RVR 4500, LNAV/VNAV all Cats and LNAV Cat C/D visibility to 1½ miles. ** RVR 1800 authorized with use of FD or AP or HUD to DA, NAwhen using Taunton altimeter setting.					
ATIS 126.85	PROVIDENCE APP CON* 128.7 269.525	NEW BEDFORD TOWER* 118.1 (CTAF) 0 239.0	GND CON 121.9	UNICOM 122.95	

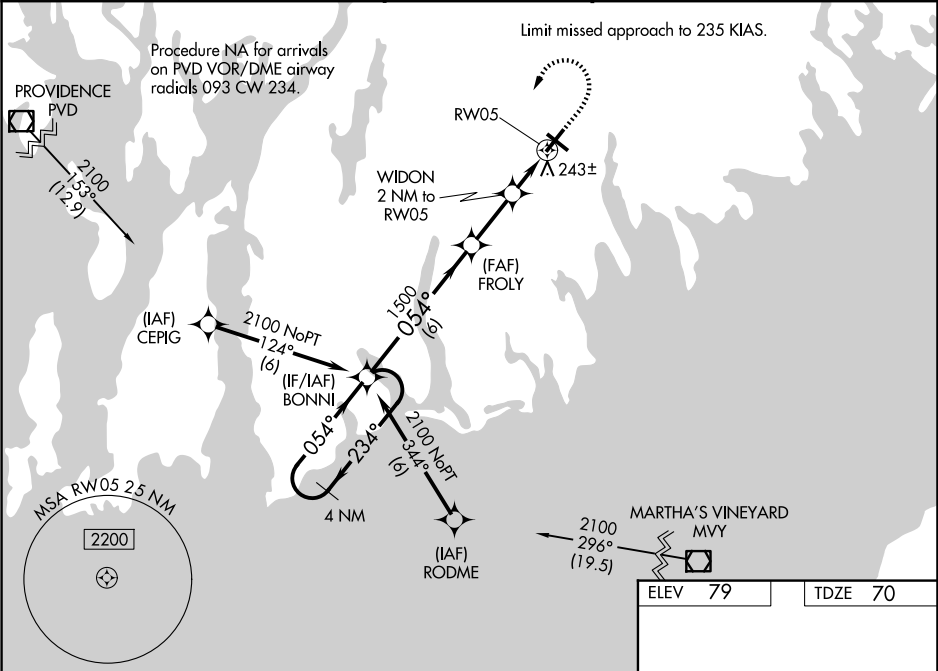

4 NM Holding Pattern		BONNI		FROLY		WIDON 2 NM to RW05		RW05		*740		*1.2 NM to RW05		*LNAV only.			
2100		←234°		054°→		054°		1500		1500		1500		1500			
GP 3.00°		TCH 49															
6 NM		2.4 NM		0.8		1.2											
CATEGORY	A		B		C		D										
LPV DA **			270/24		200 (200-½)												
LNAV/VNAV DA			453/45		383 (400-¾)												
LNAV MDA	500/24		430 (500-½)		500/40		430 (500-¾)										
CIRCLING	620-1		640-1		720-1¾		960-3										
	541 (600-1)		561 (600-1)		641 (700-1¾)		881 (900-3)										