



WAAS CH 77835 W33A	APP CRS 331°	Rwy Ldg 4500 TDZE 41 Apt Elev 47
--	------------------------	---

RNAV (GPS) RWY 33
NANTUCKET MEML (ACK)

⚠ Baro-VNAV NA when using Hyannis altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). When local altimeter setting not received, use Hyannis altimeter setting: increase all DA 63 feet and all MDA 80 feet; increase LNAV Cats C and D visibility 1/8 mile and Circling Cat C visibility 1/4 mile. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2500 direct CEROD and on track 260° to CLAMY and hold.

ATIS 127.5	BOSTON APP CON 126.1 318.1	NANTUCKET TOWER * 118.3 (CTAF) 0	GND CON 132.5	UNICOM 122.95
----------------------	--------------------------------------	--	-------------------------	-------------------------

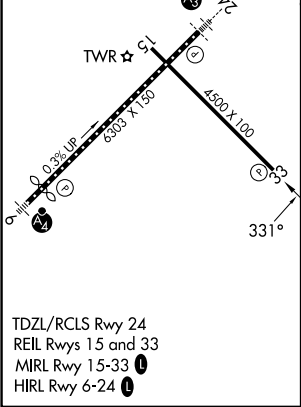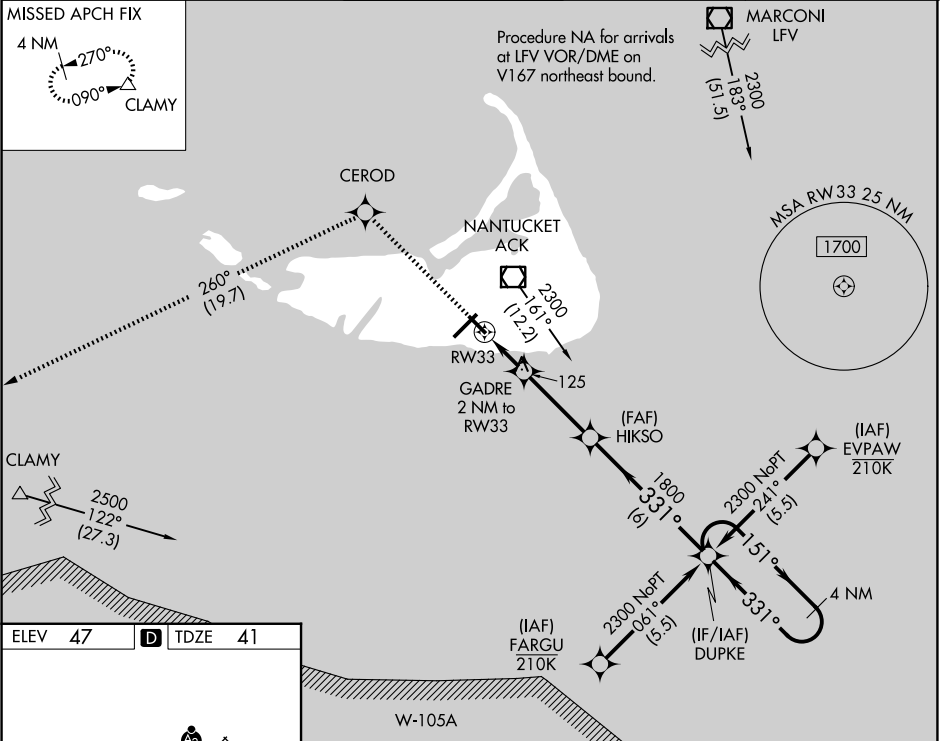

2500	CEROD	CLAMY	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 45).	
* LNAV only.		HIKSO	DUPKE	
GADRE 2 NM to RW33		1800	151°	
RW33		*720	331°	
2 NM		3.4 NM	6 NM	
CATEGORY	A	B	C	D
LPV DA	291-1 250 (300-1)			
LNAV/VNAV DA	301-1 260 (300-1)			
LNAV MDA	380-1 339 (400-1)			
CIRCLING	480-1 433 (500-1)	500-1 453 (500-1)	720-2 673 (700-2)	1000-3 953 (1000-3)

NE-1, 25 DEC 2025 to 22 JAN 2026

NE-1, 25 DEC 2025 to 22 JAN 2026