

WAAS CH 82510 W07A	APP CRS 065°	Rwy Ldg 4784 TDZE 319 Apt Elev 331
--	------------------------	---

RNAV (GPS) RWY 7
WATERTOWN INTL (ART)

RNP APCH - GPS.




For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV visibilities all Cats to 1 $\frac{3}{8}$ SM and LNAV Cat C/D visibilities to 1 $\frac{3}{8}$ SM.

MALSR



MISSED APPROACH: Climb to 900 then climbing left turn to 3500 direct NOYAG and hold.

ASOS 132.325	KGTB ATIS 119.525	WHEELER-SACK APP CON 124.875 307.125	CLNC DEL 120.8	UNICOM 123.0 (CTAF) 0
------------------------	-----------------------------	--	--------------------------	---------------------------------

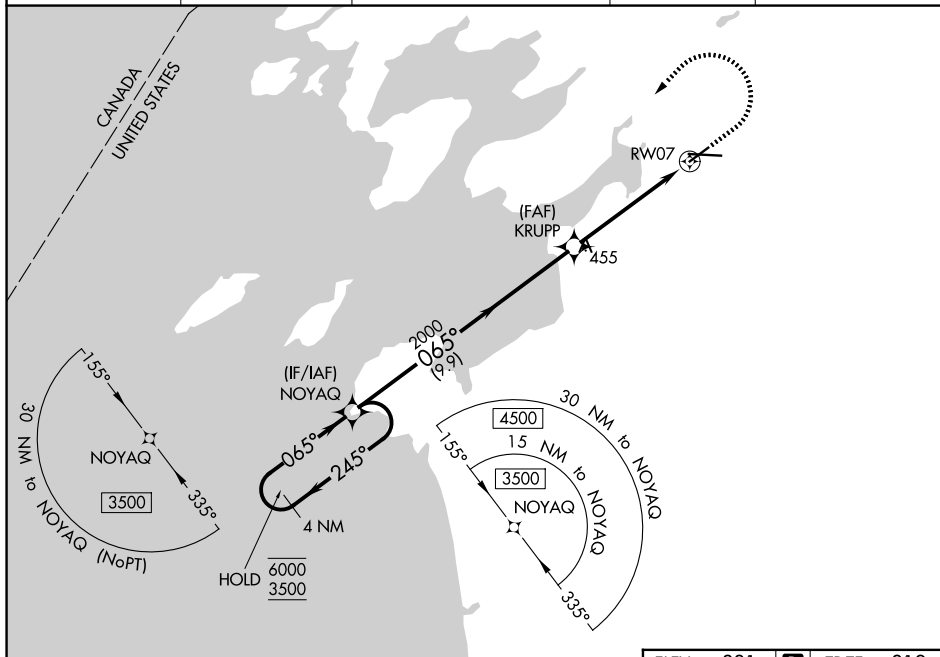

4 NM Holding Pattern

NOYAQ

6000 ← 245°
3500 → 065°

GP 3.00°
TCH 55

2000

2000

9.9 NM

3.8 NM

1.4 NM

KRUPP

2000

1.4 NM to RW07

RW07

NOYAQ

900

3500

NOYAQ