

WAAS CH 82038 W18A	APP CRS 180°	Rwy Idg 5298 TDZE 680 Apt Elev 682
--	------------------------	---

RNAV (GPS) RWY 18

DECATUR (DEC)

RNP APCH - GPS.

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.


▲

Rwy 18 helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH:

Climb to 2300 direct OKEVE and hold.

ATIS 126.35	CHAMPAIGN APP CON ★ 132.85 290.225	DECATUR TOWER ★ 118.9(CTAF) 291.775	GND CON 121.75 291.775	UNICOM 122.95
-----------------------	--	---	----------------------------------	-------------------------

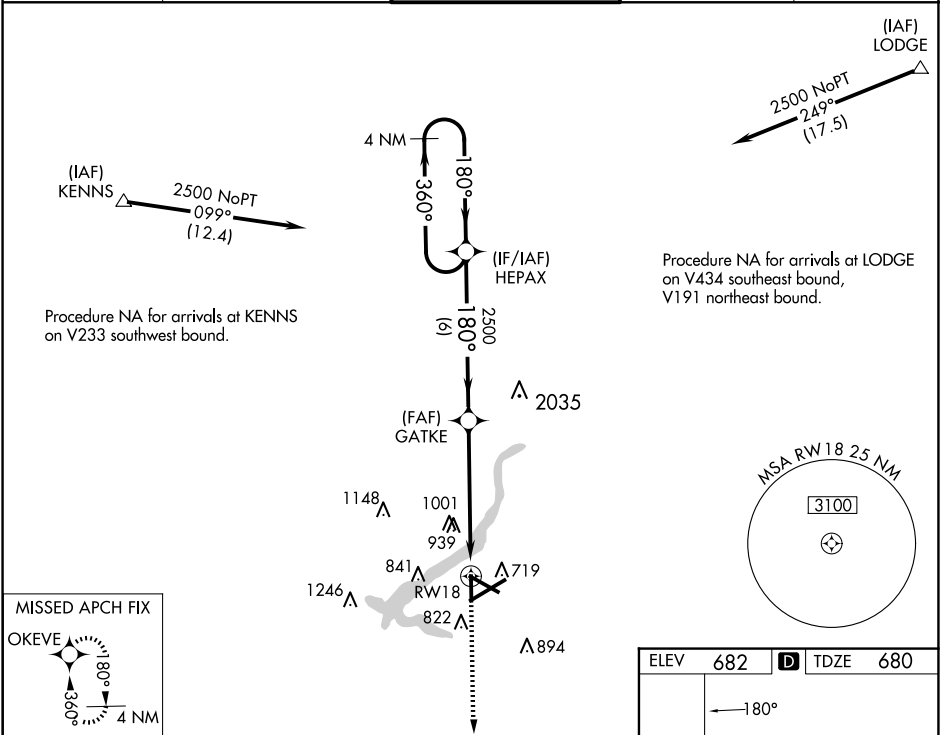

4 NM Holding Pattern					2300 OKEVE	
HEPAX GATKE 2500					1.6 NM to RW18	
2500 ← 360° 180° → 2500					RW18	
GP 3.00° TCH 54						
6 NM 4 NM 1.6 NM						
CATEGORY	A	B	C	D		
LPV DA	952-7/8		272 (300-7/8)			
LNAV/VNAV DA	1279-17/8		599 (600-17/8)			
LNAV MDA	1240-1 560 (600-1)		1240-15/8 560 (600-15/8)			
CIRCLING	1240-1 558 (600-1)		1360-2 678 (700-2)		1360-21/4 678 (700-21/4)	

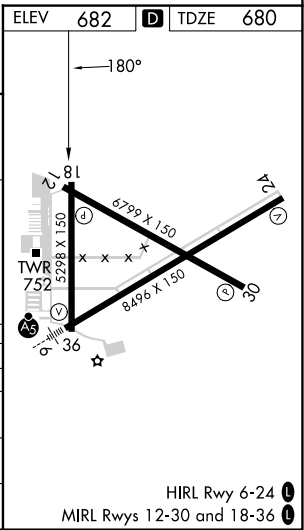

EC-3, 25 DEC 2025 to 22 JAN 2026

EC-3, 25 DEC 2025 to 22 JAN 2026