RNAV (GPS) RWY 24

DECATUR (DEC)

WAAS CH 93738 W24A	APP CRS 240°	Rwy Idg 8496 / TDZE 682 / Apt Elev 682

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.
Baro-VNAV and VDP NA when using Logan County altimeter setting.
When local altimeter setting not received, use Logan County altimeter setting; increase LPV DA to 1012 feet and visibility all Cats ¼ mile, LNAV/VNAV DA to 1168 feet and visibility all Cats ¼ mile; increase all MDA 80 feet and LNAV visibility Cats C/D ⅜ mile, Circling visibility Cats C/D ¼ mile.

MISSED APPROACH: Climb to 2300 direct FIKDO and hold.

ATIS	CHAMPAIGN APP CON★	DECATUR TOWER★	GND CON	UNICOM
126.35	132.85 290.225	118.9 (CTAF) L 291.775	121.75 291.775	122.95

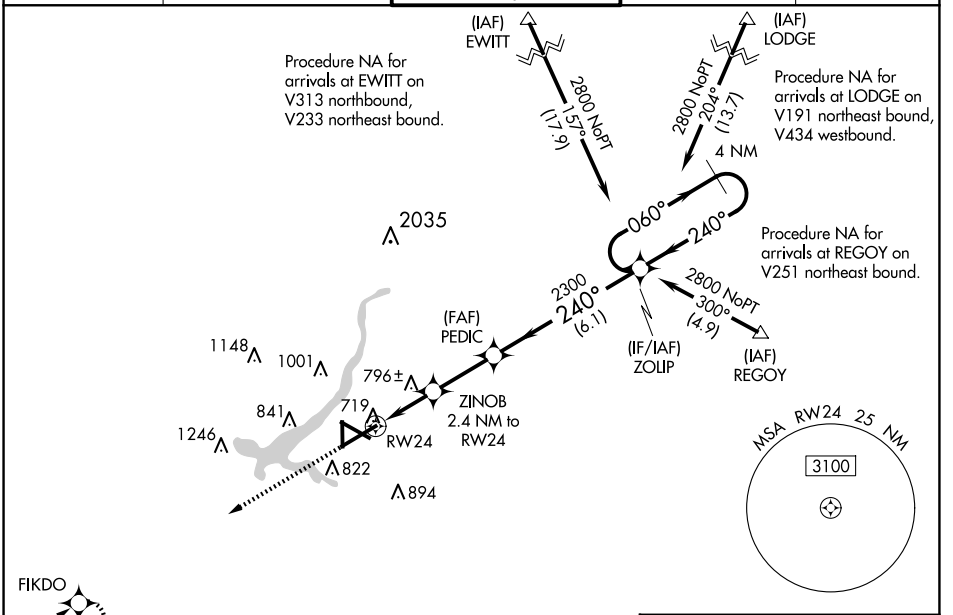

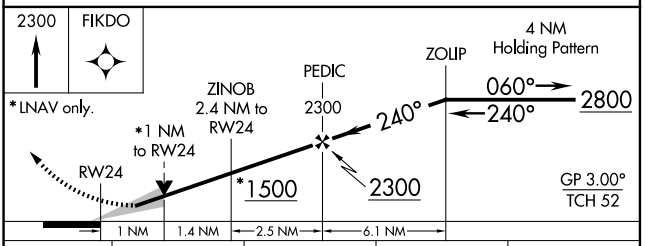

CATEGORY	A	B	C	D
LPV DA	932-¾ 250 (300-¾)			
LNAV/VNAV DA	1088-1⅜ 406 (500-1⅜)			
LNAV MDA	1060-1 378 (400-1)			
C CIRCLING	1140-1 458 (500-1)	1240-1 558 (600-1)	1360-2 678 (700-2)	1360-2¼ 678 (700-2¼)



HIRL Rwy 6-24 L
MIRL Rwys 12-30 and 18-36 L

EC-3, 25 DEC 2025 to 22 JAN 2026
EC-3, 25 DEC 2025 to 22 JAN 2026