



LOC I-AZO 110.9	APP CRS 354°	Rwy Ldg TDZE 868 Apt Elev 874
---------------------------	------------------------	---

ILS or LOC RWY 35

KALAMAZOO/BATTLE CREEK INTL (AZO)

ADF required. DME required for LOC only. RADAR required for procedure entry.		MALSR 	MISSED APPROACH: Climb to 2000 then climbing left turn to 2800 direct AUSTN LOM/AZO 6.4 DME and hold.
▼ ▲ NA	DME from AZO DME. DME use requires simultaneous reception of I-AZO and AZO DME. Circling Rwy 5, 9, 23, 27 NA at night. When local altimeter setting not received, use BTL altimeter setting: increase S-ILS 35 DA to 1112 feet; increase all MDAs 60 feet and visibility S-LOC 35 Cats C/D to RVR 4500 and Circling visibility Cats C/D ¼ SM. * RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Battle Creek altimeter setting).		

ATIS 127.25	GREAT LAKES APP CON ★ 121.2 239.25	KALAMAZOO TOWER ★ 118.3 (CTAF) 0 257.875	GND CON 121.9	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

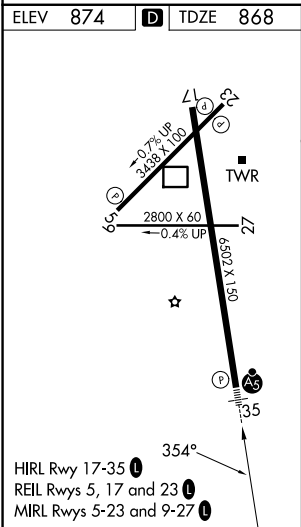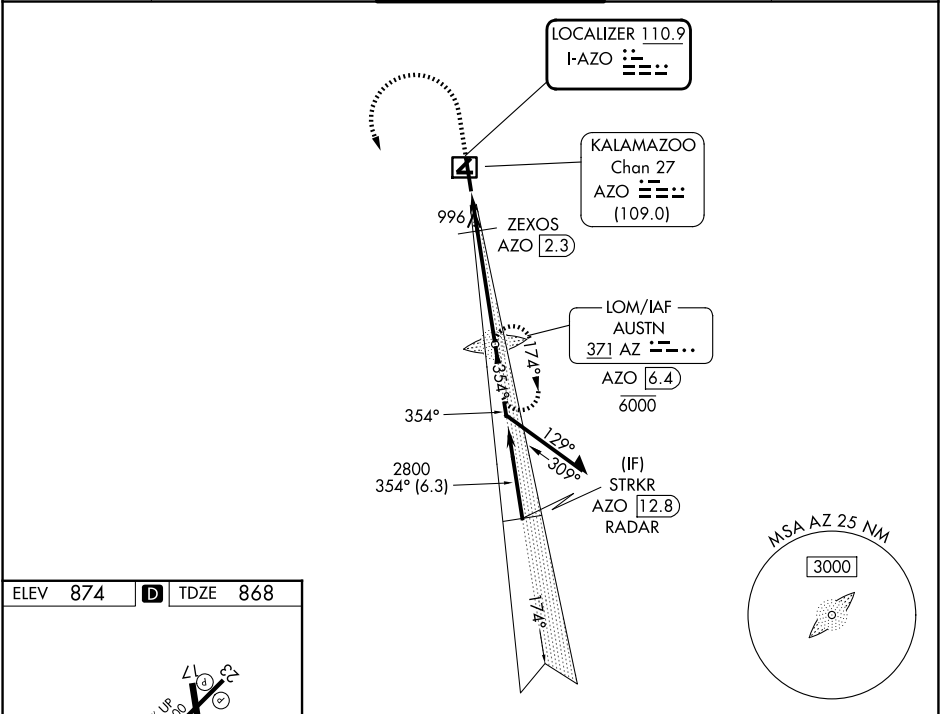

2000 2800 ↑ ↖ AUSTN LOM AZO [6.4]		AUSTN LOM AZO [6.4] 6000 2710 174° Remain within 10 NM		
AZO [0.8] ZEXOS AZO [2.3] 1400 2800 GS 3.00° TCH 53		354° 2800		
1.5 NM 4.1 NM				
CATEGORY	A	B	C	D
S-ILS 35*	1068/24 200 (200-½)			
S-LOC 35	1260/24	392 (400-½)	1260/35	392 (400-¾)
CIRCLING	1340-1	466 (500-1)	1560-2 686 (700-2)	1560-2¼ 686 (700-2¼)