



WAAS CH 82200 W18A	APP CRS 185°	Rwy Idg TDZE Apt Elev 592
--	------------------------	--

RNAV (GPS) RWY 18
PRYOR FLD RGNL (DCU)

⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Huntsville Intl-Carl T Jones Fld altimeter setting: increase LPV DA to 817 and LNAV/VNAV DA to 920 and all visibilities ½ mile. Increase all MDA 40 feet and LNAV Cat C and D visibility ⅓ mile. VDP and Baro-VNAV NA when using Huntsville Intl-Carl T Jones Fld altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F).

MISSED APPROACH:
Climb to 3000 direct
ATHEN and hold.

ASOS 118.375	HUNTSVILLE APP CON* 118.05 239.0	UNICOM 123.075 (CTAF) 0
------------------------	--	-----------------------------------

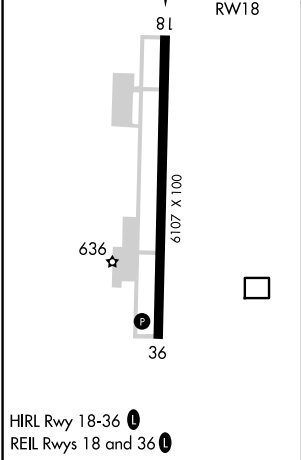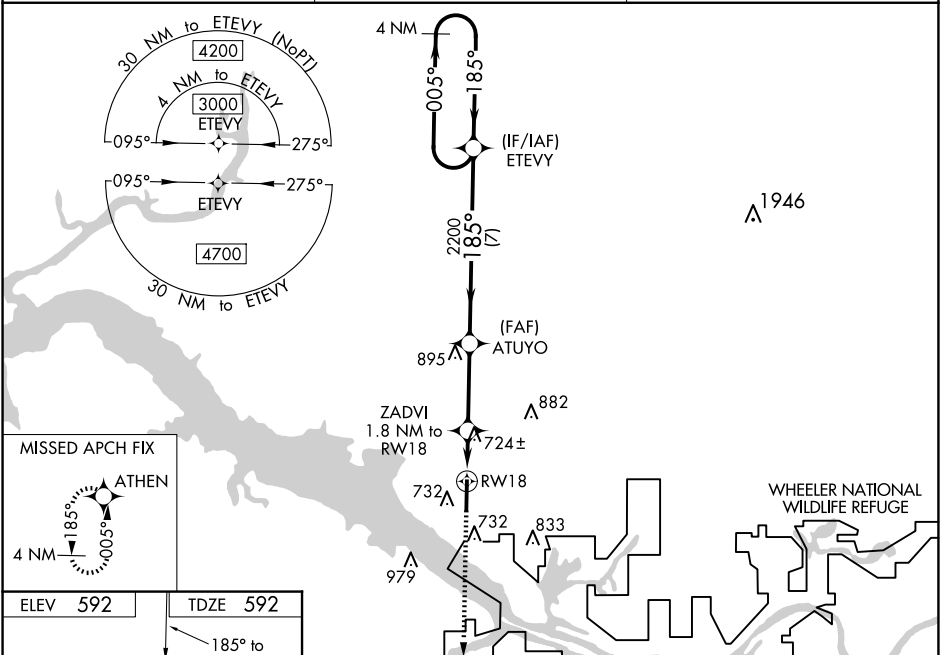

ELEV 592	TDZE 592
3000 ATHEN	ETEYV 4 NM Holding Pattern
*LNAV only	ZADVI 1.8 NM to RWY 18
*1.1 NM to RWY 18	ATUYO 2200
1180	2200
1.1 NM	0.7
3.1 NM	7 NM
GP 3.00° TCH 47	
CATEGORY	A B C D
LPV DA	792-¾ 200 (200-¾)
LNAV/VNAV DA	895-1 303 (400-1)
LNAV MDA	980-1 388 (400-1) 980-1⅛ 388 (400-1⅛)
CIRCLING	1040-1 448 (500-1) 1060-1 468 (500-1) 1340-2¼ 748 (800-2¼) 1340-2½ 748 (800-2½)

SE-4, 25 DEC 2025 to 22 JAN 2026

SE-4, 25 DEC 2025 to 22 JAN 2026