

ILS RWY 25 (CAT II)


LOC I-TYV 109.9	APCH CRS 252°	Rwy Idg 12,001 TDZE 301 Arprt Elev 312	[USAF]	LITTLE ROCK AFB (KLRF)
RNP APCH. RNAV1-GPS or RADAR required.			ALSf-2 	MISSED APPROACH: Climb to 900 then climbing right turn to 3000 direct HERCK and hold.

ATIS ★	APP CON	TOWER	GND CON
119.175 251.1	119.5 306.2	120.6 269.075	132.8 275.8


CATEGORY II ILS-SPECIAL
AIRCREW & AIRCRAFT
CERTIFICATION REQUIRED

ALTERNATE MISSED APPROACH:
Climbing to 3000 fly runway heading
until 2 DME, then turn right heading 360°
expect further clearance from ATC.


PROCEDURE EFFECTIVE BY NOTAM




JACKSONVILLE
Chan 29 LRF 
(109.2)



CAT E Acft: RADAR required
when R-2403 active

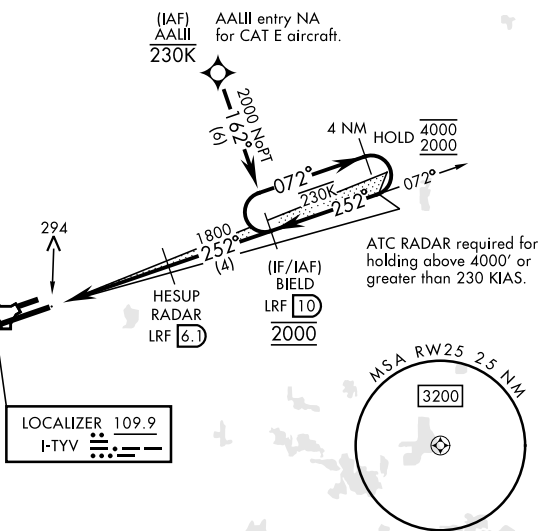

EMERG SAFE ALT 100 NM 4000

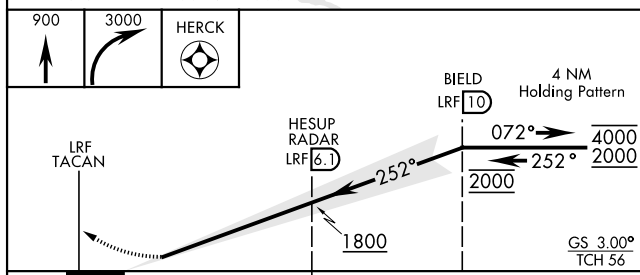

CATEGORY	A	B	C	D	E
S-ILS 25	RA 94/12 100 DA 401				

