



RNAV (GPS) RWY 16
DRAUGHON-MILLER CENTRAL TEXAS RGNL (TPL)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to $\frac{3}{4}$ SM and LNAV Cats C/D visibility to $\frac{7}{8}$ SM.



MISSED APPROACH: Climb to 3600 direct FADXY and on track 074° to BARBA and hold, continue climb-in-hold to 3600.

AWOS-3PT 134.975	GRAY APP CON 120.075 370.0	CLNC DEL 125.9	UNICOM 123.0 (CTAF) 0
----------------------------	--------------------------------------	--------------------------	---------------------------------

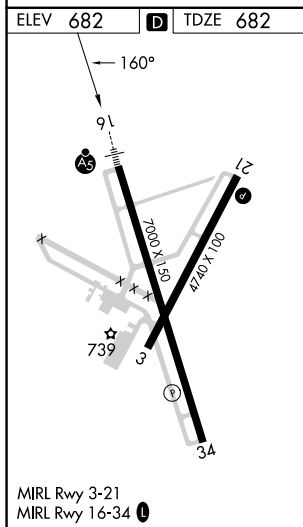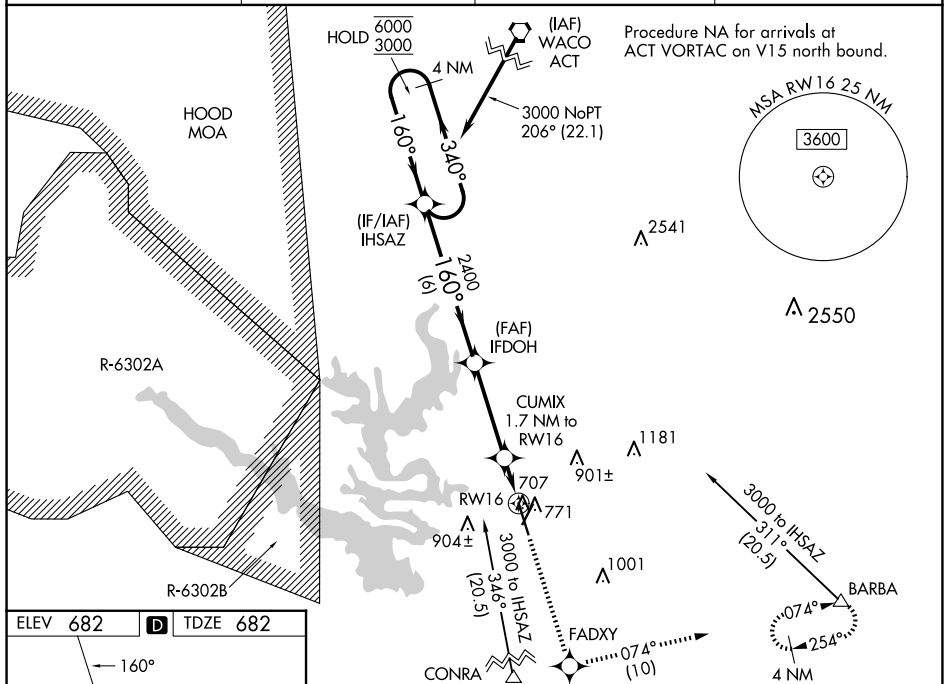

4 NM Holding Pattern

IHS AZ

GP 3.00° TCH 45°

IFDOH 2400

CUMIX 1.7 NM to RW16

0.7 NM to RW16

FADXY tr 074°

BARBA △

6 NM 3.6 NM 1 NM 0.7 NM

882-1/2 200 (200-1/2)

932-1/2 250 (300-1/2)

960-1/2 278 (300-1/2)

1140-1 458 (500-1)

1200-1 518 (600-1)

1280-1 1/2 598 (600-1 1/2)

1420-2 1/4 738 (800-2 1/4)