

WAAS CH 78434 W12A	APP CRS 121°	Rwy Ldg TDZE Apt Elev	3998 2209 2209
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 12

PHILIP (PHP)


▼

⚠

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Pierre altimeter setting and increase all DA 204 feet and MDA 220 feet and increase LPV and LNAV/VNAV all Cats visibility $\frac{3}{8}$ mile, increase LNAV Cat C visibility $\frac{1}{2}$ mile, and increase Circling Cat C visibility $\frac{3}{4}$ mile. Helicopter visibility reduction below 1 SM NA. Procedure NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). Baro-VNAV NA when using Pierre altimeter setting.

MISSED APPROACH: Climb to 4500 direct UTMZY and hold.

ASOS 118.375	DENVER CENTER 127.95 338.2	UNICOM 122.8 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

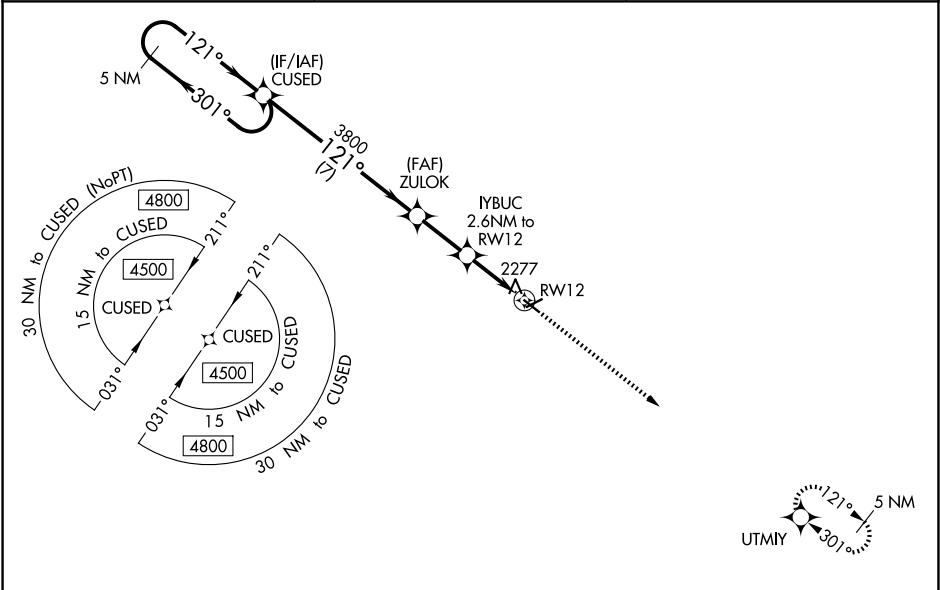

5 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 31).		4500	UTMZY
CUSED		ZULOK		3800	YBUC
4500 ← 301°		→ 121°		3800	2.6 NM to RW12
GP 3.00° TCH 40		*3060		RW12	
7 NM		2.3 NM		2.6 NM	
CATEGORY	A	B	C	D	
LPV DA	2467-1	258 (300-1)		NA	
LNAV/VNAV DA	2742-1 $\frac{7}{8}$	533 (600-1 $\frac{7}{8}$)		NA	
LNAV MDA	2680-1	471 (500-1)	2680-1 $\frac{3}{8}$ 471 (500-1 $\frac{3}{8}$)	NA	
CIRCLING	2720-1 511 (600-1)	2760-1 551 (600-1)	2840-1 $\frac{3}{4}$ 631 (700-1 $\frac{3}{4}$)	NA	

