



WAAS CH 93734 W35A	APP CRS 351°	Rwy Idg 4996 TDZE 762 Apt Elev 782
--	------------------------	---

RNAV (GPS) RWY 35
ANDERSON RGNL (AND)

T DME/DME RNP-0.3 NA. When local altimeter setting not received, use Clemons altimeter setting and increase all MDA 60 feet; increase all Cats C and D visibility ¼ mile. Straight-in
A Rwy 35 NA at night, Circling Rwy 17, 35 NA at night. Rwy 17, 35 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:
Climb to 3200 direct
UTOTE and hold.

ASOS 120.675	GREER APP CON ★ 118.8 270.275	CTAF 123.6
------------------------	---	----------------------

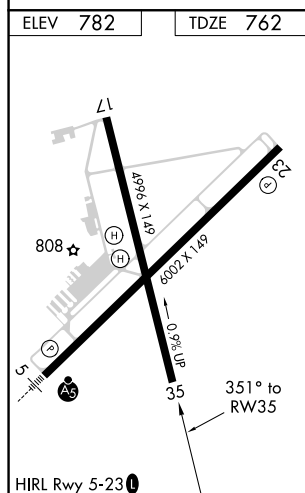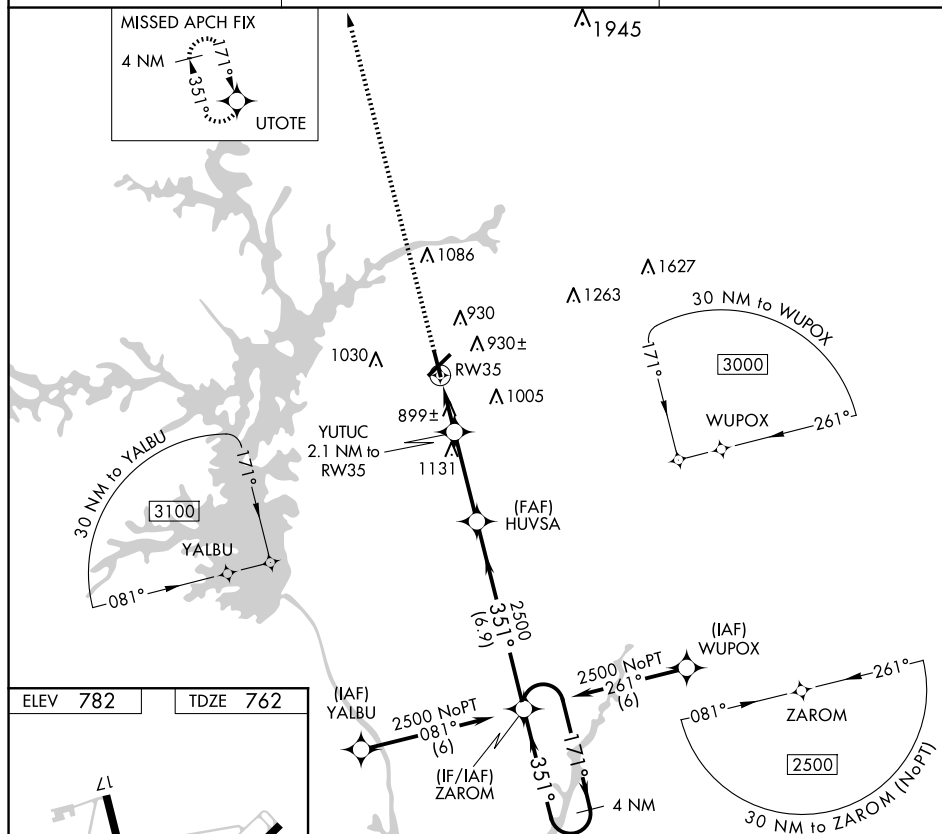

Visual Segment - Obstacles.

4 NM Holding Pattern

YUTUC 2.1 NM to RW35

HUVSA

ZAROM

3200

UTOTE

351°

171°

2500

351°

1440

2.1 NM

3.3 NM

6.9 NM

CATEGORY	A	B	C	D
LP MDA	1160-1	398 (400-1)	1160-1 $\frac{1}{8}$	398 (400-1 $\frac{1}{8}$)
LNAV MDA	1180-1	418 (400-1)	1180-1 $\frac{1}{8}$	418 (400-1 $\frac{1}{8}$)
C CIRCLING	1260-1 478 (500-1)	1320-1 538 (600-1)	1440-1 $\frac{3}{4}$ 658 (700-1 $\frac{3}{4}$)	1500-2 $\frac{1}{4}$ 718 (800-2 $\frac{1}{4}$)