
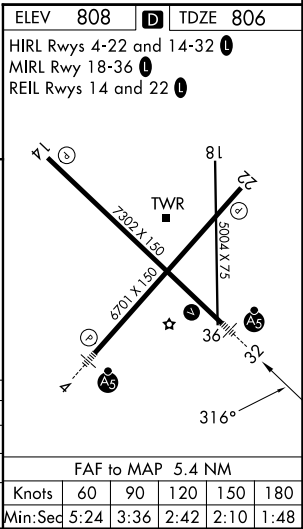
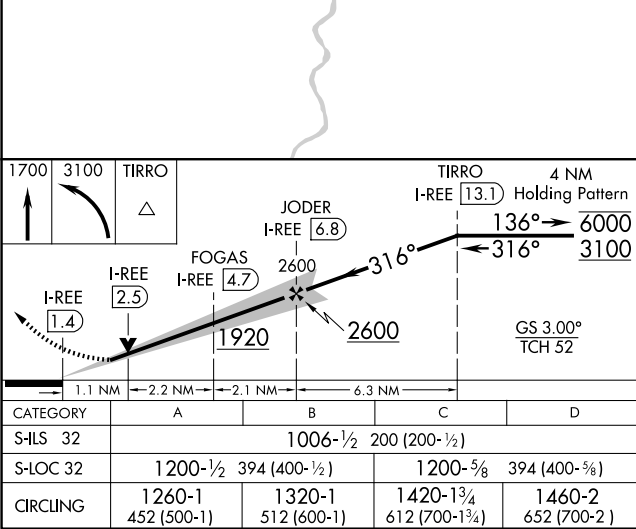


LOC/DME I-REE	APP CRS	Rwy Ldg	7302
111.35	316°	TDZE	806
Chan 50 (Y)		Apt Elev	808

ILS or LOC RWY 32

SOUTHERN WISCONSIN RGNL (JVL)

DME required. RNP APCH - GPS.				
⚠ ⚠ Circling Rwy 18 NA at night. When local altimeter setting not received, use Chicago/Rockford Intl altimeter setting and increase DA to 1075, increase all MDA 80 feet. Increase S-LOC 32 Cats C and D visibility ¾ SM, and Circling Cats C/D ¼ SM. VDP NA when using Chicago/Rockford Intl altimeter setting. For inop ALS when using Chicago/Rockford Intl altimeter setting, increase S-ILS 32 visibility all Cats to ¾ SM and S-LOC 32 visibility Cats C/D to 1¾ SM.		MALSR AS		MISSED APPROACH: Climb to 1700 then climbing left turn to 3100 direct TIRRO and hold.
ATIS	ROCKFORD APP CON	JANESVILLE TOWER ★	GND CON	UNICOM
128.25	121.0 327.0	118.8 (CTAF) 225.4	121.65	122.95

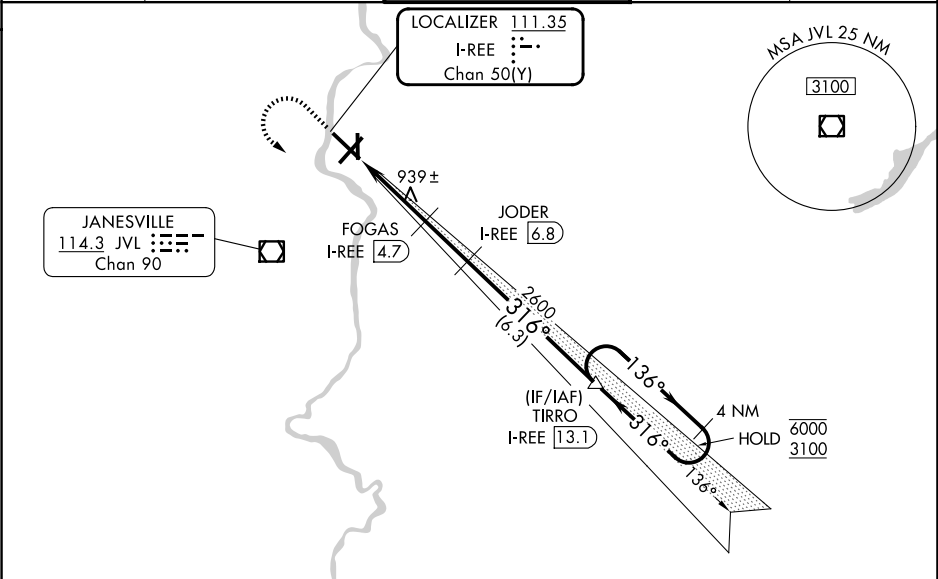

EC-3, 25 DEC 2025 to 22 JAN 2026

EC-3, 25 DEC 2025 to 22 JAN 2026