

WAAS CH 61399 W10A	APP CRS 108°	Rwy Ldg 6500 TDZE 337 Apt Elev 342
--	------------------------	---

RNAV (GPS) RWY 10
CAPE GIRARDEAU RGNL (CGI)

RNP APCH - GPS.



T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Cairo altimeter setting and increase LPV DA to 585 feet, LNAV/VNAV DA to 761 feet, and all visibilities ½ SM. Increase all MDA 60 feet and LNAV Cat C/D visibility ½ SM, and Circling Cats C/D visibility 1/4 SM. Baro-VNAV and VDP NA when using Cairo Rgnl altimeter setting. For inop ALS, increase LNAV/VNAV visibility all Cats and LNAV visibility Cat C/D to 1 SM. For inop ALS, when using Cairo altimeter setting, increase LNAV/VNAV all Cats and LNAV Cat C/D visibility to 1 SM.

MALSR



MISSED APPROACH:
Climb to 3000 direct
FISAV and hold.

ASOS 120.55	MEMPHIS CENTER 133.65 292.15	CAPE GIRARDEAU TOWER ★ 125.525 (CTAF) L	GND CON 124.7	UNICOM 122.95
----------------	---------------------------------	---	------------------	------------------

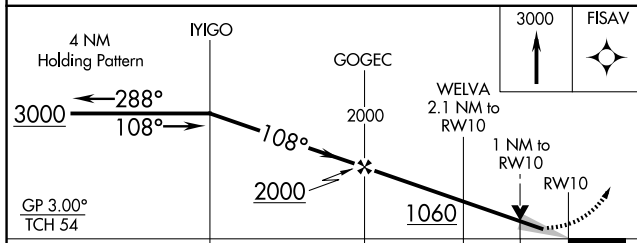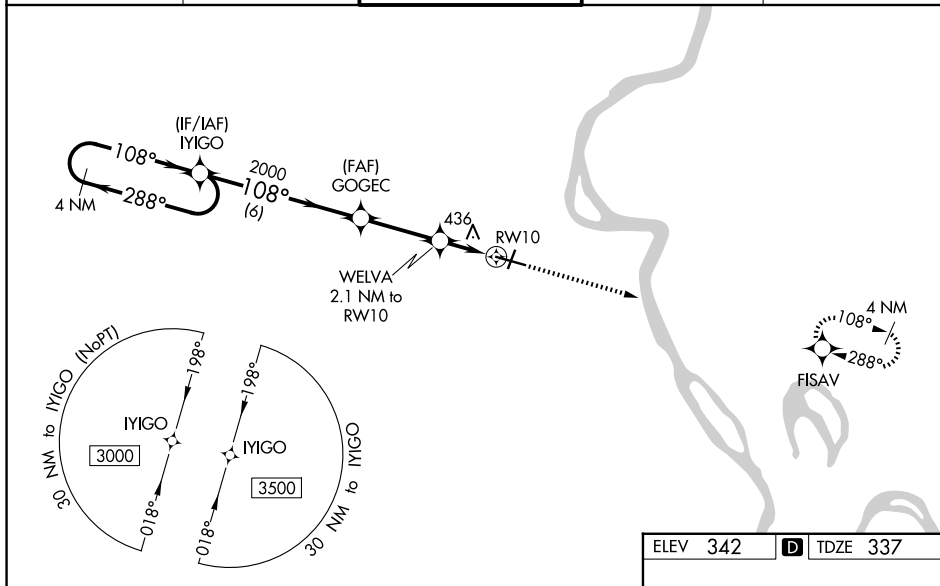

CATEGORY		A	B	C	D
LPV	DA	537-½ 200 (200-½)			
LNAV/ VNAV	DA	713-5⁄8 376 (400-5⁄8)			
LNAV	MDA	700-½ 363 (400-½)		700-5⁄8 363 (400-5⁄8)	
CIRCLING		880-1 538 (600-1)	960-1 618 (700-1)	1000-1¾ 658 (700-1¾)	1080-2¼ 738 (800-2¼)

